

# 0335 KSS 插鞘式紮線帶 PUSH MOUNT TIE

配線槽

配線標誌

紮線帶

結束帶

固定座

固定頭、浪管

保護部品


接線頭

套管


固定夾

PC板部品

扣具

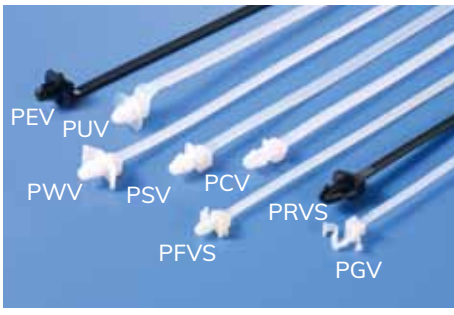

使用方法

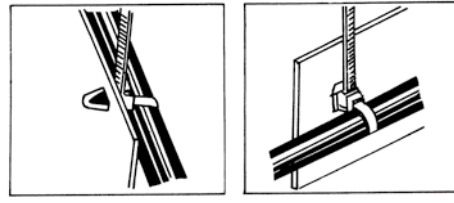

型號 Item No.	長 L		寬 W	最大束線徑 Max.Bundle Dia.	基板 孔徑	基板 厚度	承受力 Min Loop Tensile Strength		包裝 Packing
	mm	inch					lbs	kgs	
PCVS-130	132	5 1/8"	4.8	30	4.8	3.0	50	22	100pcs
PCV-155	168	6 1/8"	3.8	40	4.8	3.0	40	18	
PCVS-200	203	8"	4.8	50	4.8	3.0	50	22	
PCV-200	203	8"	4.8	50	6.4	3.0	50	22	
PEV-170BK	170	6 11/16"	5.3	40	6.8	12.0	26	12	
PFVS-130	131	5 1/8"	3.7	30	4.8	2.4	40	18	
PFVS-155	157.5	6 1/8"	3.7	38	4.8	2.4	40	18	
PFVS-200	207	8"	3.7	50	4.8	2.4	40	18	
PGV-100	101	4 1/8"	3.4	25	4.8	2.5	40	18	
PGV-130	135	5 5/16"	3.4	33	4.8	2.5	40	18	
PSV-130	132	5 1/8"	4.8	30	6.4	3.3	50	22	
PSV-200	202	8"	4.8	50	6.4	3.3	50	22	
PUV-170	168.6	6 5/8"	5.4	38	6.8	1.6	50	22	
PWVS-100	112	4 3/8"	2.5	25	4.6	2.6	18	8	
PWVS-130	133	5 1/8"	4.8	30	4.6	4.5	50	22	
PWVS-155	157	6 1/8"	3.5	36	4.6	2.6	40	18	
PWV-130	132	5 1/8"	4.8	30	6.2	2.8	50	22	
PWV-170	170	6 11/16"	4.6	40	6.0	3.0	50	22	
PWV-200	201	8"	4.8	50	6.2	2.8	50	22	
※ PRVS-130HSBK	134.5	5 1/4"	4.8	30	8.2	5.0	50	22	

材質：UL合格之NYLON 66，防火等級 94V-2。

※PRVS-130HSBK為熱穩定型黑色。

用法：先將基板挖孔，再把紮線帶插入孔內，再將電線束緊即可。

