


0703 KSS 自由絕緣保護套 (U型) EDGING GROMMET



無鹵素 環保
單位：mm

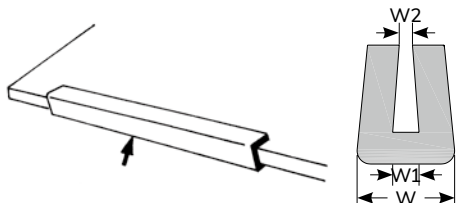

型號 Item No.	W	W1	W2	適用鐵板厚度 Available Thickness	包裝 Packing
ED-010	3.3	1.0	0.5	1.0 以下	每包 10M
ED-012	3.4	1.2	0.6	1.0~1.2	
ED-016	4.6	1.6	0.9	1.2~1.6	
ED-020	4.5	2.0	1.1	1.6~2.0	
ED-024	5.1	2.4	1.2	2.0~2.4	
ED-032	5.8	3.2	1.5	2.4~3.2	
ED-055	7.9	5.5	4.5	4.5~5.5	

材質：PE (本色)。

用法：依據鐵板、PC板斷面長度大小，截取所需之長度，直接套入斷面即可。
用途：電線電纜之保護及絕緣。

配線槽

配線標誌

紮線帶

結束帶

固定座

固定頭、浪管

保護部品

接線頭

套管

固定夾

PC板部品

扣具

0705 KSS 電源線扣 STRAIN RELIEF BUSHING



E98707 97798 無鹵素 環保





材質：UL合格之NYLON 66 (黑色)，防火等級 94V-2。

用途：各種家電用品、儀器、電腦之電源線固定及保護用，避免電源線滑動而被鐵板割傷。

※須搭配工具使用。

電源線扣裝配圖

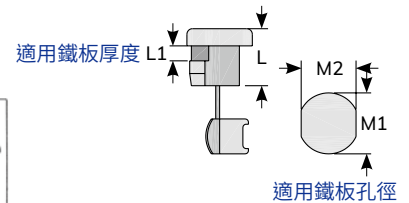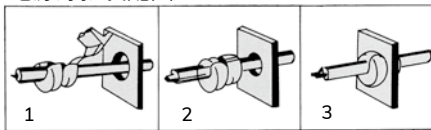

單位：mm

型號 Item No.	適用電線 Wires Accommodate			鐵板孔徑 Mounting Hole		線扣長度 Part L. L	適用機板厚度 Available Thickness L1	包裝 Packing
	型狀	UL 線	尺寸	M1	M2			
SR-F21	扁線 Flat	SPT-1 2C #18	2.3X4.5 / 2.8X5.3	9.5	8.7	10.3	0.5-1.6	100pcs
SR-F23		SPT-1 2C #18	2.3X4.5 / 2.8X5.3	9.5	8.7	10.3	1.8-3.2	
SR-F31		SPT-1 2C #18	3.0X5.6	11.2	9.9	10.3	1.0-1.6	
SR-F32		SPT-1 2C #18	3.0X5.6	11.0	9.9	10.3	1.9-2.5	
SR-F41		SPT-2 2C #18	3.0X7.1 / 3.8X7.6	12.7	11.8	10.3	0.5-1.6	
SR-F42		SPT-2 2C #18	3.0X7.1 / 3.8X7.6	12.7	11.8	10.3	1.8-2.5	
SR-F51		SPT-3 2C #18	5X10.4	14.3	12.9	15.2	0.5-1.6	
SR-F53		SPT-3 2C #18	5X10.4	14.3	12.9	15.2	1.8-3.5	
SR-F83			6X15.2	21.6	21.3	20.4	2.0-3.4	
SR-5R1		圓線 Round	SVT 3C #18	Ø6.2~Ø7.4	12.8	11.5	11.0	
SR-5R2	SVT 3C #18		Ø6.2~Ø7.4	13.0	11.5	11.0	1.8-2.5	
SR-6W2	SJT 3C #18		Ø7.6	12.8	11.8	11.0	1.8-2.3	
SR-6P1	SJT 3C #18		Ø7.4~Ø8.2	15.9	14.0	14.8	0.5-1.6	
SR-6P3	SJT 3C #18		Ø7.4~Ø8.2	15.9	14.0	14.8	1.9-3.2	
SR-6R1	SJT 3C #16		Ø8.2~Ø9.2	15.9	14.0	14.8	0.5-1.6	
SR-6R3	SJT 3C #16		Ø8.2~Ø9.2	15.9	14.0	14.8	1.9-3.2	
SR-7R1	SJT 3C #14		Ø9.2~Ø10.5 / Ø11	19.9	17.0	19.0	0.5-1.6	
SR-7R3	SJT 3C #14		Ø9.2~Ø10.5 / Ø11	19.7	17.0	19.0	1.9-3.2	
SR-8R3	SJT 3C #14		Ø12~Ø15.2	21.6	21.3	20.6	1.9-3.2	
SR-9R1	電源供應器專用	#18 20~30 pcs	Ø11~Ø15	15.0	19.0	18.0	0.5-1.6	
SR-9R7		SJT 3C #10	Ø15.2~Ø16.3 / Ø17.5	28.0/30.2	25.5	25.0	1.0-3.2	