


Technical Data

Terminal index

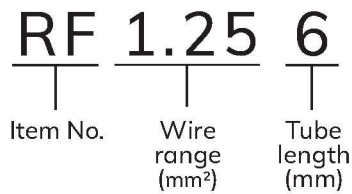

STUD SIZE	
mm - inch	mm - inch
3.2 - #4	6.4 - 1/4"
3.7 - #6	8.4 - 5/16"
4.3 - #8	10.5 - 3/8"
5.3 - #10	13.0 - 1/2"

INSULATED COLOR	
RED:	1.25 mm ² = AWG 22-16
BLUE:	2.0 mm ² = AWG 16-14
BLACK:	3.5 mm ² = AWG 14-12
YELLOW:	5.5 mm ² = AWG 12-10
● WELCOME FOR SPECIAL COLOR REQUEST	

Item No.	Product Name
R	Ring Terminal
Y	Y Terminal
H	Hook Terminal
LY	Flanged Spade Terminal
RF	Insulated Ring Terminal
YF	Insulated Y Terminal
ERF	Insulated Ring Terminal Easy Entry
EYF	Insulated Y Terminal Easy Entry
HF	Insulated Hook Terminal
LYF	Flanged Spade Insulated Terminal
B	Butt Splice
P	Parallel Splice
PIN-AF	Pin Insulated Terminals
PIN	Pin Terminals
EPIN-AF	Pin Insulated Terminals Easy Entry
BF	Butt Splice Insulated
BHS	Butt Splice (Water Proof & Heat Shrinkable)
BN	Nylon Insulated Butt Splice
LV-B	Male Lug
LV-A	Female Lug
1.25-7A 2-7A 5.5-7A	Non Insulated Female Lug
PV-A	Insulated Female Lug
MF-A	Piggy Back Disconnects
PN-A	Nylon Insulated Female Lug
PN-B	Nylon Insulated Male Lug
ELV-B	Male Lug Easy Entry
ELV-A	Female Lug Easy Entry
CLV-A	Female Lug Cover
F-B	Insulated Bullet
F-A	Fully Receptacle
FNH-B	Nylon Insulated Bullet
FNH-A	Nylon Fully Receptacle
FL-A	Flag Femaled Disconnects
VTL	Vinyl Flag Sleeve
FLN-A	Nylon Insulated Flag Femaled Disconnects
BD	Blade Terminal
BD-F	Blade Insulated Terminal
LB	Lipped Blade Terminal
LB-F	Lipped Blade Insulated Terminal
VT	Vinyl Sleeve
C	Cable Lugs
CL	Cable Lugs-High Voltage
CL-2D	Cable Lugs-High Voltage
BL	Cable Lugs-High Voltage
TC CTC TP	C Type Copper Compression Connectors