


# 0712 KSS 扣式護線套 SNAP BUSHING


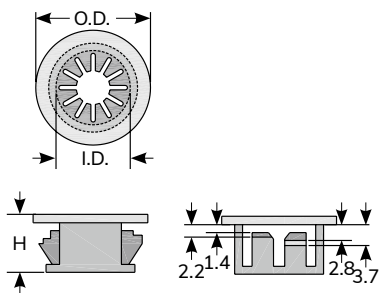


NEW

型號 Item No.	鐵板孔徑 Mounting Hole		鐵板厚度 Thickness	最大線孔 I.D.	覆蓋 O.D.	高度 H	包裝 Packing
	mm	inch					
RSB-16	15.9	5/8"	3.2	12.7	20.5	10.3	100pcs
RSB-19	19.1	3/4"	3.2	14.8	24.0	10.0	
RSB-21	20.6	13/16"	3.2	15.2	24.3	10.0	
RSB-22	22.2	7/8"	3.2	17.0	25.4	11.5	
RSB-25S	25.4	1"	3.2	21.0	27.0	11.4	
RSB-25	25.4	1"	3.2	20.4	28.5	11.5	
RSB-28	27.6	1 3/32"	3.2	23.0	31.2	11.5	
RSB-35	34.9	1 3/8"	3.2	29.5	38.5	11.7	
RSB-38	38.1	1 1/2"	3.2	31.0	41.0	11.0	

材質：UL合格之 NYLON 66 (黑色)，防火等級 94V-2。  
特點：花瓣型出線孔設計，可使大小規格電線均能固定，不會隨意搖晃。

# 0713 KSS 開口型扣式護線套 SNAP BUSHING (OPEN)



型號 Item No.	鐵板孔徑 Mounting Hole		鐵板厚度 Thickness	最大線孔 I.D.	覆蓋 O.D.	高度 H	包裝 Packing
	mm	inch					
OSB-9S	9.5	3/8"	1.6	7.6	12.4	6.1	100pcs
OSB-12S	12.7	1/2"	1.6	11.0	17.0	7.3	
OSB-10	9.5	3/8"	3.5	6.0	11.8	9.8	
OSB-13	12.7	1/2"	3.2	7.5	15.1	10.3	
OSB-16	15.9	5/8"	3.2	11.2	18.5	10.3	
OSB-19	19.1	3/4"	3.2	12.5	21.0	10.3	
OSB-22	22.2	7/8"	3.2	17.0	24.6	10.3	
OSB-26	25.4	1"	3.2	20.0	28.0	10.6	

材質：UL合格之 NYLON 66 (黑色)，防火等級 94V-2。  
用途：使粗糙的鐵孔變成圓滑的出線孔。各種電線電纜之保護及絕緣。  
用法：不需工具，只要用手輕輕一壓，即可完成裝配。  
特點：對於出線已裝配好而未加任何襯套保護時，開口型護線套可於事后再補裝 (不必重新拆線)，而達到保護電線之功能。