



# 0126 KSS ROUND TYPE WIRING DUCT

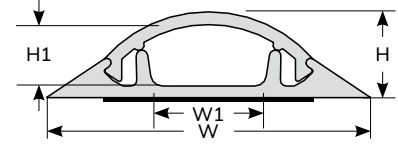

- Material: **UL94V-0** and **M1** flame rated, UL approved PVC.
- Color: Grey. (Brown, Milk available)
- PVC service temperature: 85°C
- Backed with high quality double sided tape for permanent stick. Good for floor wiring to facilitate trolley pass and to avoid trips.

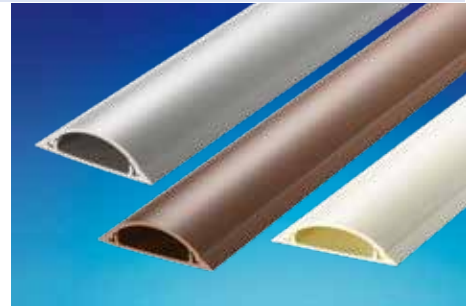

Item No.	Color	W	W1	H	H1	Length
		mm	mm	mm	mm	
RDA-30	Grey	28.8	11.0	7.4	5.2	1M With Adhesive Tape
RDA-30BN	Brown					
RDA-30MW	Milk					
RDA-40	Grey	38.5	18.8	11.5	8.5	
RDA-40BN	Brown					
RDA-40MW	Milk					
RDA-50	Grey	50.0	23.3	12.3	8.8	
RDA-50BN	Brown					
RDA-50MW	Milk					
RDA-60	Grey	60.0	33.3	13.8	10.7	
RDA-60BN	Brown					
RDA-60MW	Milk					
RDA-70	Grey	70.0	44.0	17.0	13.0	
RDA-70BN	Brown					
RDA-70MW	Milk					
RDA-90	Grey	87.5	57.5	21.0	16.5	
RDA-90BN	Brown					
RDA-90MW	Milk					
RDA-120	Grey	118.5	85.5	30.0	26.5	
RDA-120BN	Brown					
RDA-120MW	Milk					

※ This product has similar function with 0125 RD-duct except for some difference in outlook appearance.

■ The above color cards are for reference only.

# 0130 KSS SOFT SPLIT- INSERT WIRING DUCT



- Material: The wiring duct base is rigid PVC, and the two sides are flexible PVC.
- Hard base extruded PVC supplied with double sided adhesive base.
- Split insert design of duct body (soft) for easy insertion and removal of wire application.
- Suitable for wire dia. under 10mm.



Item No.	Color	W	W1	H	H1	Length
		mm	mm	mm	mm	
RSD-8WE	White	12	8.0	10.8	7.0	1M With Adhesive Tape
RSD-10BN	Brown	15	10.5	13.8	9.8	

■ The above color cards are for reference only.

