


1201 KSS 插鞘式扣線套 WIRE SADDLE



單位：mm




型號 Item No.	尺寸 Dimension				基板孔徑 M1	適用板厚 T1	包裝 Packing
	L	W1	H1	H2			
JWS-0402V0	5.0	4.5	5.1	2.8	3.5	0.5~1.6	100pcs
JWS-0504V0	5.1	5.3	6.3	4.4	3.5	0.5~1.6	

材質：UL合格之NYLON 66 (白色)，防火等級 94V-0。

1201 KSS 插鞘式扣線套 WIRE SADDLE



單位：mm

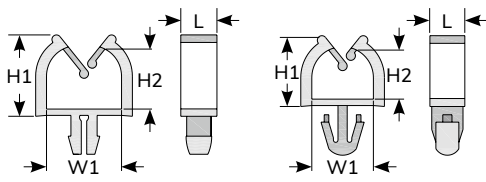

JWB-0706 JWS-0605V0,0706V0,0910

型號 Item No.	尺寸 Dimension				基板孔徑 M1	適用板厚 T1	包裝 Packing
	L	W1	H1	H2			
JWB-0706	4.0	7.7	9.7	6.4	3.0	1.6	100pcs
JWS-0605V0	3.8	6.6	7.8	5.0	3.5	1.6	
JWS-0706V0	3.8	7.9	9.7	6.4	3.5	1.6	
JWS-0910	4.0	9.3	13.4	10.7	3.5	1.0	


材質：JWS-0605V0, JWS-0706V0為UL合格之NYLON 66 (白色)，防火等級 94V-0。

JWS-0910, JWB-0706為UL合格之NYLON 66 (本色)，防火等級 94V-2。

1201 KSS 馬鞍型夾線套(鉤式) LOCKING WIRE SADDLE



單位：mm

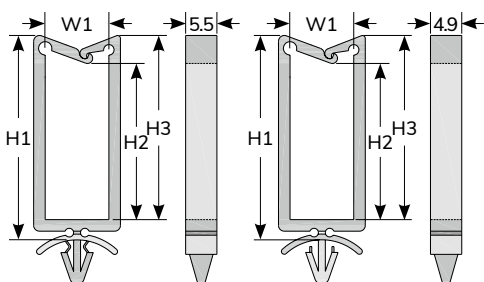

KWS-0,1,2,3

KWS-2L

型號 Item No.	尺寸 Dimension				適用PC板		包裝 Packing
	W1	H1	H2	H3	鑽孔 M1	板厚 T1	
KWS-0	11.0	13.0	4.0	9.0	4.8	2.0	100pcs
KWS-1	11.0	19.0	10.5	14.2	4.8	2.0	
KWS-2	11.0	27.0	19.0	23.0	4.8	2.0	
KWS-2L	10.4	18.0	12.0	15.0	4.8	4.0	
KWS-3	11.0	35.8	28.0	31.1	4.8	2.0	

材質：UL合格之NYLON 66 (本色)，防火等級 94V-2。

用法：基板鑽孔 4.8mm，先把夾線套固定，再將欲固定之電線放入套中、從兩側輕輕一扣，即可將電線牢牢扣住，可作任何方向與角度的固定電線之用。