

0326 KSS DOUBLE HEAD KNOT TIE

- Material :UL94V-2 flame rated, UL approved Nylon 66.
- Easy to install and release.
- Beaded design keeps wires from shifting or slipping.




◆ NYLON 66

Item No.		Length		W	Max. Bundle Dia.	Packing
Natural	Black	mm	inch	mm	mm	
KTV-145	KTV-145BK	145	5 3/4"	2.0	35	100pcs
KTV-150	KTV-150BK	150	6"	3.6	38	
KTV-170	KTV-170BK	167	6 9/16"	3.9	41	
KTV-180	KTV-180BK	180	7"	3.6	46	
KTV-230	KTV-230BK	230	8 15/16"	3.6	62	

- Material : PE
- Easy to install and release.
- Beaded design keeps wires from shifting or slipping.


◆ PE

Item No.		Length		W	Max. Bundle Dia.	Packing
Natural	Black	mm	inch	mm	mm	
KTV-145E	KTV-145EBK	145	5 3/4"	2.0	35	100pcs
KTV-150E	KTV-150EBK	150	6"	3.6	38	
KTV-170E	KTV-170EBK	167	6 9/16"	3.9	41	
KTV-180E	KTV-180EBK	180	7"	3.6	46	
KTV-230E	KTV-230EBK	230	8 15/16"	3.6	62	

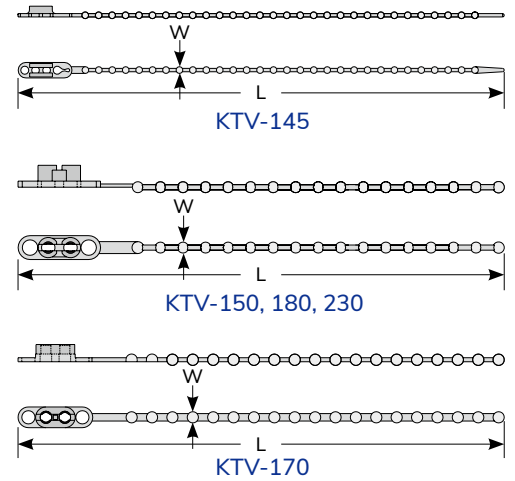

0327 KSS KNOT TIE

- Material: UL94V-2 flame rated, UL approved Nylon 66.
- Mounting hole Diameter 6 mm ; chassis thickness 1.6 mm.
- Easy to install and release.
- Beaded design keeps wires from shifting or slipping.

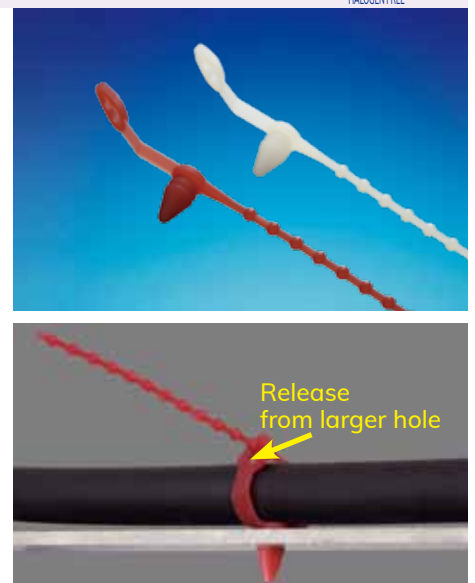

Item No.		Length		W	Max. Bundle Dia.	Packing
Red	Natural	mm	inch	mm	mm	
STV-130RD7	STV-130	130	5 1/8"	3	35	100pcs

