



0318 KSS PUSH MOUNT COLLECT TIE

- Material: UL94V-2 flame rated, UL approved Nylon 66.
- Application: Drill a 5.4mm diameter round hole near electrical outlet and fix cables to the panel board.
- Function: Suitable for cable binding and fixing on industrial and home electronics.
- Feature: Releasable.

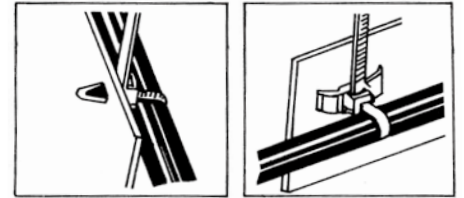

Item No.	Length		W mm	Max. Bundle Dia. mm	Min. Loop Tensile Strength		Packing
	mm	inch			lbs	kgs	
PHV-150	152.5	6"	7.9	37	30	13	100pcs

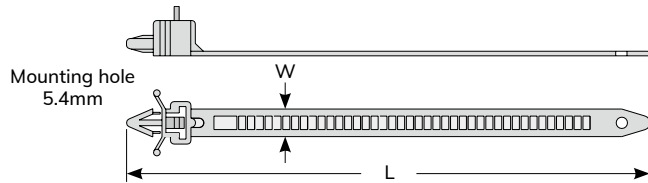


0319 KSS SADDLE MOUNTING TIE

- Material: UL94V-2 flame rated, UL approved Nylon 66.
- Application: Fix with the bolt (as Figure) and insert the tie through the locking head.



Item No.	Length		W mm	Packing
	mm	inch		
PMA-150	144.6	5 11/16"	7	100pcs

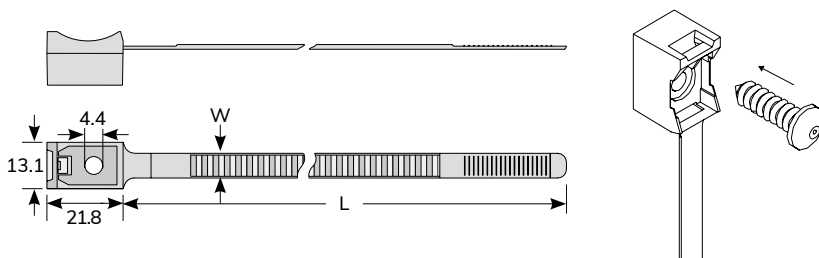


0319 KSS SADDLE MOUNTING TIE

- Material: UL94V-2 flame rated, UL approved Nylon 66.
- Color: Natural.
- Application: Drill an 8mm diameter round hole for CWP-38 wall plug (as Figure), insert CWP-38 onto the tie head and fix objects on the wall by locking the tie. The tie can also be fixed on the wall with the bolt.
- Standard color is natural, other special colors are available upon request.



Item No.	Length		W mm	Packing
	mm	inch		
PMB-145	144.6	5 11/16"	7.1	100pcs
PMB-240	238.2	9 3/8"	7.1	

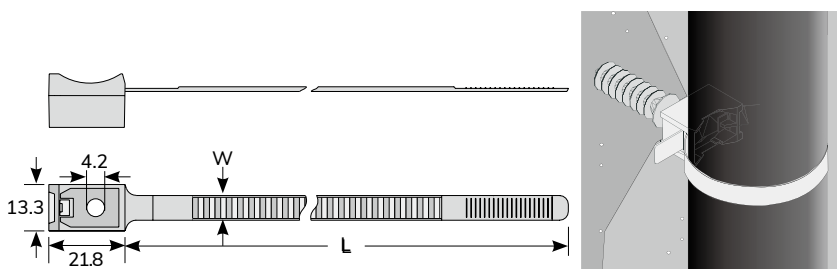

(Refer to P.106)

CWP-38