

0316 KSS 可退式紮線帶 RELEASABLE CABLE TIE




型號 Item No.	長 L		寬 W mm	最大束線徑 Max.Bundle Dia. mm	承受力 Min Loop Tensile Strength		包裝 Packing
	mm	inch			lbs	kgs	
RCV-100	102	4"	3.6	25	40	18	100pcs
RCV-150	150	6"	4.6	39	50	22	
RCV-200	200	8"	4.6	55	50	22	
RCV-250	250	10"	4.8	74	50	22	
RCV-300	300	11 7/8"	4.8	88	50	22	
RCV-370	370	14 9/16"	4.8	102	50	22	
※RCV-780T	780	30 3/4"	9.0	230	175	80	
RCV-914	914	36"	9.0	275	175	80	
NEW RCV-1219	1219	48"	9.0	372	175	80	
RCV-230XL	232.5	8 15/16"	12.8	60	250	114	
RCV-290XL	292.5	11 1/2"	12.8	79	250	114	
RCV-405XL	407.5	16"	12.8	116	250	114	
RCV-480XL	482.5	18 7/8"	12.8	140	250	114	
RCV-580XL	576.6	22 7/8"	12.8	172	250	114	

材質：UL合格之NYLON 66，防火等級 94V-2。

顏色：本色。

特點：可再鬆開，重複使用。

※ RCV-780T 尖尾

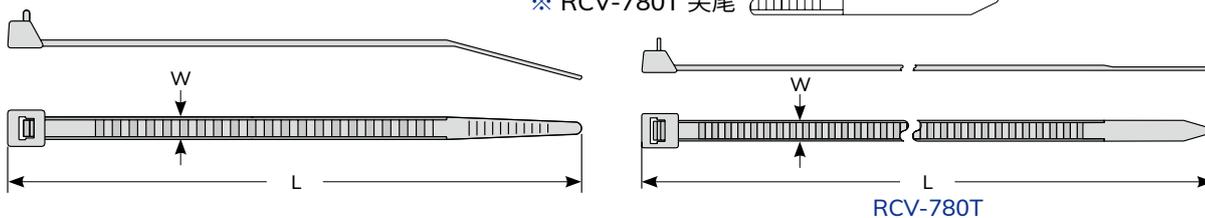

0316 KSS 可退式紮線帶 RELEASABLE LASHING CABLE TIE



型號 Item No.	長 L		寬 W mm	最大束線徑 Max.Bundle Dia. mm	承受力 Min Loop Tensile Strength		包裝 Packing
	mm	inch			lbs	kgs	
HRCV-240XL	240	9 7/16"	12.8	60	250	114	100pcs
HRCV-300XL	300	11 7/8"	12.8	79	250	114	
HRCV-415XL	415	16 5/16"	12.8	116	250	114	
HRCV-490XL	490	19 5/16"	12.8	140	250	114	
HRCV-590XL	590	23 1/4"	12.8	170	250	114	


材質：UL合格之NYLON 66，防火等級94V-2。

顏色：本色。

特點：1.可再鬆開，重複使用。

2.超寬型設計，承受力特強，適合大電纜網綁。

3.頭部設有收尾裝置，可收納多餘的帶尾，亦可捆束物品，作為雙束紮線帶。

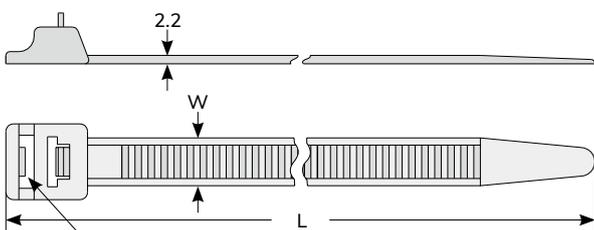

可將捆緊後紮線帶多餘的尾部扣住。