


# 0606 KSS NYLON CABLE GLAND

- Material: UL94V-2 flame rated, UL approved Nylon 66, TPE for Seal, PVC for Washer.
  - Color: Black, available in other colors.
  - Suit a variety of applications, and diverse industries.
  - Function :Mount gland to pre-drilled panel hole, use locknut to fix gland on board, insert the cables in the seal, and then tighten up the nut to hold cables in position.
  - Feature : Simply and quickly fixed, high degree of the protection IP68 preventing dust and water.
  - Available to order the accessories separately. Follow the drawing and add the letter to the suffix part number, L for locknut, W for washer, B for gland body, S for seal, N for nut. For example, EGL-7 if you would like to only order locknut for PG7.
- ※ EG-7LS has smaller nut.

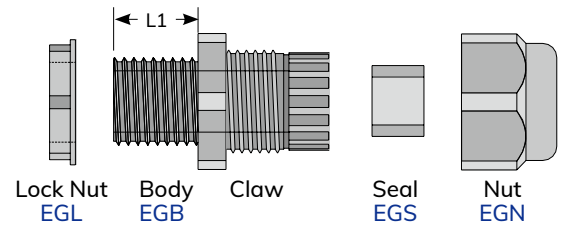

## PG THREAD (DIN STANDARD) ※Protection : IP68 ( only if the washer is assembled )

UNIT : mm

Item No.	Thread	Thread O.D.	Mounting Hole	L1	Cable Range	Packing
EG-7	PG7	12.5	12.5+0.2	7.9	3~6.5	WITHOUT WASHER 50pcs
EG-7LS	PG7	12.5	12.5+0.2	7.9	3~6.5	
EG-9	PG9	15.2	15.2+0.2	8.2	4~8	
EG-9L	PG9	15.2	15.2+0.2	14.7	4~8	
EG-11	PG11	18.6	18.6+0.2	7.9	5~10	
EG-11L	PG11	18.6	18.6+0.2	14.9	5~10	
EG-13.5	PG13.5	20.4	20.4+0.2	8.9	6~12	
EG-13.5L	PG13.5	20.4	20.4+0.2	15.8	6~12	
EG-16	PG16	22.5	22.5+0.2	9.8	10~14	
EG-21	PG21	28.3	28.3+0.3	10.8	13~18	
EG-29	PG29	37.0	37.0+0.3	10.8	18~25	25pcs
EG-36	PG36	47.0	47.0+0.3	15.0	22~32	10pcs
EG-42	PG42	54.0	54.0+0.3	14.5	30~38	
EG-48	PG48	59.3	59.3+0.3	16.7	34~44	