


0606 KSS NYLON CABLE GLAND



- Material: UL94V-2 flame rated, UL approved Nylon 66, TPE for Seal, PVC for Washer.
- Color: Black, available in other colors.
- Suit a variety of applications, and diverse industries.
- Function :Mount gland to pre-drilled panel hole, use locknut to fix gland on board, insert the cables in the seal, and then tighten up the nut to hold cables in position.
- Feature : Simply and quickly fixed, **Body and Claw are separate.**
- Available to order the accessories separately. Follow the drawing and add the letter to the suffix part number, L for locknut, W for washer, B for gland body, S for seal, C for claw, N for nut. For example, CEG-7 if you would like to only order locknut for PG7.

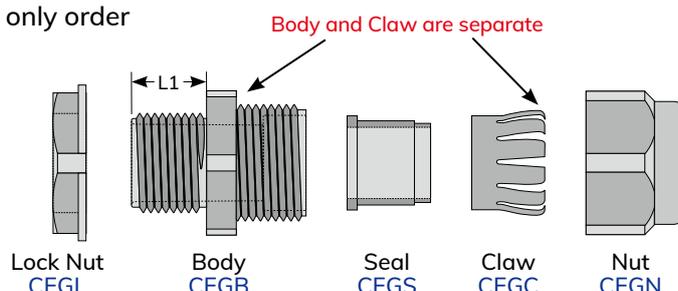

PG THREAD (DIN STANDARD) ※Protection : IP68 (only if the washer is assembled)

UNIT : mm

Item No.	Thread	Thread O.D.	Mounting Hole	L1	Cable Range	Packing
CEG-7	PG7	12.5	12.5+0.2	8.0	3~6.5	WITHOUT WASHER 50pcs 25pcs 10pcs
CEG-9	PG9	15.2	15.2+0.2	8.2	4~8	
CEG-11	PG11	18.6	18.6+0.2	8.2	5~10	
CEG-13.5	PG13.5	20.4	20.4+0.2	9.0	6~12	
CEG-16	PG16	22.5	22.5+0.2	9.9	10~14	
CEG-21	PG21	28.3	28.3+0.3	10.8	13~18	
CEG-29	PG29	37.0	37.0+0.3	10.8	18~25	
CEG-36	PG36	47.0	47.0+0.3	14.7	22~32	
CEG-42	PG42	54.0	54.0+0.3	14.7	30~38	
CEG-48	PG48	59.3	59.3+0.3	16.7	34~44	