


0615 KSS FLEXIBLE CONDUIT ADAPTOR

- Material: UL94V-2 flame rated, UL approved Nylon 66.
- Color: Grey
- Constructed of three parts to fix flexible conduit in control panel, machinery and apparatus.
- Application
 1. Mount body to pre-drilled panel hole.
 2. Insert conduit through nut.
 3. Insert conduit to claw and fix it with nut to complete works.
- ※ Available in LDPE material upon request.

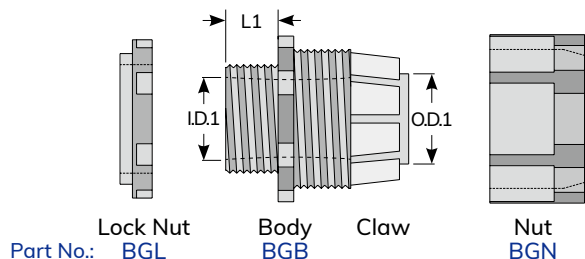

※Protection : IP55

UNIT : mm

Item No.	Thread	Thread O.D.	Mounting Hole	O.D.1	I.D.1	L1	Suitable Conduit	Packing
BG-10	M12X1.25	12.0	12+0.2	7.5	5.8	9.7	BG-10P	50pcs
BG-14		18.0	18+0.2	10.5	9.0	10.0	BG-14P	
BG-16		18.0	18+0.2	10.8	9.0	10.0	BG-16P	
BG-18	M16X1.5	16.0	16+0.2	13.3	10.8	9.7	BG-18P	
BG-20		21.0	21+0.2	14.7	12.9	10.0	BG-20P	
BG-22	M20X1.5	20.0	20+0.2	17.2	14.8	9.8	BG-22P	
BG-25	M25X1.5	25.0	25+0.3	18.9	16.6	11.4	BG-25P	
BG-26	M25X1.5	25.0	25+0.3	19.8	17.6	11.4	BG-26P	25pcs
BG-32		33.0	33+0.3	24.3	22.3	12.0	BG-32P	
BG-34	M34X1.5	34.0	32+0.3	28.6	25.5	11.3	BG-34P	
BG-40		39.5	39.5+0.3	31.6	29.0	11.3	BG-40P	
BG-42	M40X1.5	40.0	40+0.3	34.8	31.4	11.5	BG-42P	10pcs
BG-48		46.0	46+0.3	40.5	36.9	12.6	BG-48P	
BG-50		46.0	46+0.3	39.5	36.9	12.6	BG-50P	