



0615 KSS 簡易型浪管固定頭 FLEXIBLE CONDUIT ADAPTOR

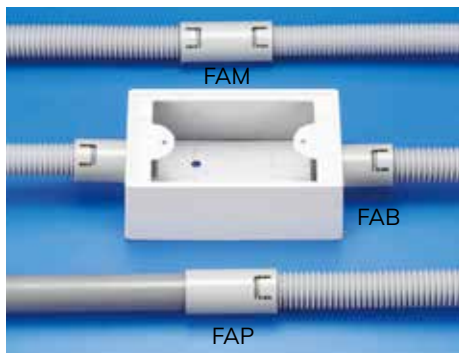

單位：mm

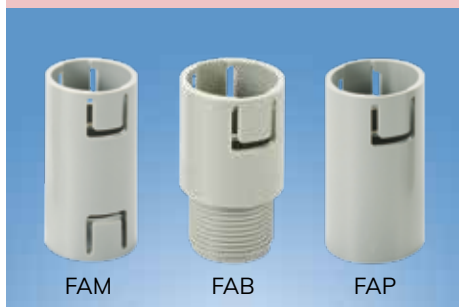


型號 Item No.	螺紋外徑 Thread O.D.	鐵板孔徑 Mounting Hole	接頭種類 TYPE	適用浪管 Suitable Conduit	包裝 Packing
FAM-18			浪管-浪管中間接頭	BG-18P 3分 (3/8")	20pcs
FAM-22				BG-22P 4分 (1/2")	
FAM-26				BG-26P 6分 (3/4")	
FAM-34				BG-34P 1吋 (1")	
FAB-18	17.0	17.0+0.2	浪管-接線盒接頭 (如需螺帽請另購)	BG-18P 3分 (3/8")	
FAB-22	20.0	20.0+0.2		BG-22P 4分 (1/2")	
FAB-26	24.0	24.0+0.3		BG-26P 6分 (3/4")	
FAB-34	32.5	32.5+0.3		BG-34P 1吋 (1")	
FAP-18			浪管-PVC管接頭	BG-18P 3分 (3/8")	
FAP-22				BG-22P 4分 (1/2")	
FAP-26				BG-26P 6分 (3/4")	
FAP-34				BG-34P 1吋 (1")	

材質：UL合格之ABS (灰色)，防火等級94HB。
特點：方便連接，節省工時。

0615 KSS 防水浪管固定頭 WATERPROOF FLEXIBLE CONDUIT ADAPTOR



NEW

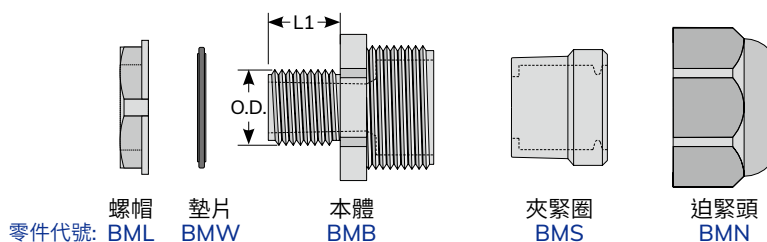

零件代號: BML BMW BMB BMS BMN

單位：mm

型號 Item No.	螺紋規格 Thread	螺紋外徑 Thread O.D.	鐵板孔徑 Mounting Hole	螺紋長度 L1	適用浪管 Suitable Conduit	包裝 Packing
BM-18	M16xP1.5	16	16+0.2	15.0	BG-16P、BG-18P、CRS-11P、CRS-13P、PA-12、CF-18P	50pcs
BM-22	M20xP1.5	20	20+0.2	15.0	BG-20P、BG-22P、CRS-15P、CRS-17P、PA-17、CF-22P	
BM-26	M25xP1.5	25	25+0.3	15.0	BG-25P、BG-26P、CRS-19P、CRS-22P、CF-26P	
BM-34	M32xP1.5	32	32+0.3	15.0	BG-32P、BG-34P、CRS-28P、PA-29、CF-34P、CPW-26POE、CP-26POE	25pcs
BM-42	M40xP1.5	40	40+0.3	15.0	BG-40P、BG-42P、CRS-32P、CRS-35P、PA-36、CF-42P、CPW-34POE、CP-34POE	10pcs
BM-48	M50xP1.5	50	50+0.3	22.4	BG-48P、CPW-40POE、CP-40POE	

材質：UL合格之NYLON 66 (黑色)，防火等級 94V-2，夾緊圈為熱可塑彈性體(TPE)，墊片為PVC。
用法：1.先將本體套入鐵板，再以螺帽固定之。

2.將浪管插入夾緊圈中，再以迫緊頭作正向旋轉迫緊。

用途：配電盤，機械中浪管固定、防水用。

※若分開訂購各零件時，請在型號後面加上各代號：螺帽 (L) 墊片 (W) 本體 (B) 夾緊圈 (S) 迫緊頭 (N)

例：訂購BM-18螺帽，型號為BML-18。