

0301 KSS 金屬可探測尼龍紮線帶 METAL DETECTABLE CABLE TIE



NEW




型號 Item No.	長 L		寬 W mm	最大束線徑 Max.Bundle Dia. mm	承受力 Min LoopTensile Strength		包裝 Packing
	mm	inch			lbs	kgs	
CV-100MD	100	4"	2.5	22	14	6	100pcs
CV-150MD	150	6"	3.6	36	25	11	
CV-200MD	203	8"	4.6	52	34	15	
CV-200MMD	203	8"	2.5	55	14	6	
CV-250MD	250	10"	4.8	68	34	15	
CV-280MD	280	11"	4.8	77	34	15	
CV-380MD	380	15"	7.6	105	88	39	
CV-385MD	385	15 3/16"	4.8	110	34	15	
CV-400MD	400	15 3/4"	4.6	116	34	15	

材質：NYLON 66內含金屬粉 (藍色)，防火等級94HB。

用法：將紮線帶尾巴穿過頭部，即可束緊。

特點：適用於食品及醫療產業，符合FDA，可用金屬感應器檢測。

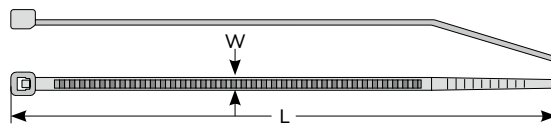


0301 KSS 耐燃尼龍紮線帶 FLAME RETARDANT CABLE TIE



型號 Item No.	長 L		寬 W mm	最大束線徑 Max.Bundle Dia. mm	承受力 Min LoopTensile Strength		包裝 Packing
	mm	inch			lbs	kgs	
CV-100V0	100	4"	2.5	22	18	8	100pcs
CV-150V0	150	6"	3.6	36	40	18	
CV-200MV0	203	8"	2.5	55	18	8	
CV-200V0	203	8"	4.6	52	50	22	
CV-300SV0	300	11 7/8"	4.8	83	50	22	
CV-368V0	368	14 1/2"	4.8	105	50	22	
CV-380V0	380	15"	7.6	105	120	55	

材質：UL合格之 NYLON 66 (白色)，防火等級 94V-0。

特點：防火等級 94V-0，可用於防火、耐燃之場所。

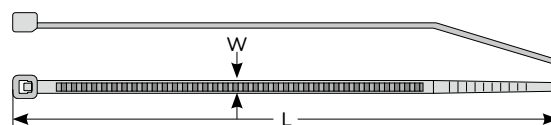

0301 KSS 耐熱尼龍紮線帶 EXTRA HIGH TEMPERATURE CABLE TIE



NEW



型號 Item No.	長 L		寬 W mm	最大束線徑 Max.Bundle Dia. mm	承受力 Min LoopTensile Strength		包裝 Packing
	mm	inch			lbs	kgs	
CV-100N46	100	4"	2.5	22	18	8	100pcs
CV-150N46	150	6"	3.6	36	40	18	
CV-200N46	203	8"	4.6	52	50	22	
CV-300SN46	300	11 7/8"	4.8	83	50	22	
CV-380N46	380	15"	7.6	105	120	55	
CV-385N46	385	15 3/16"	4.8	110	50	22	

材質：UL合格之 NYLON46 (褐色)，防火等級94V-2。

用法：將紮線帶尾巴穿過頭部，即可束緊。

特點：耐溫可至150°C，可用於超高溫之場所。

