


0301 KSS METAL DETECTABLE CABLE TIE



- Material: UL94HB flame rated Nylon 66 with metal powder.
- Color: Blue, Special color upon request.
- Application: One piece self-lock cable tie for quick installation.
- Feature: Apply for Food and Medical industrial, FDA standard, can be detected by Metal sensor.





Item No.	Length		W mm	Max. Bundle Dia. mm	Min. LoopTensile Strength		Packing
	mm	inch			lbs	kgs	
CV-100MD	100	4"	2.5	22	14	6	100pcs
CV-150MD	150	6"	3.6	36	25	11	
CV-200MD	203	8"	4.6	52	34	15	
CV-200MMD	203	8"	2.5	55	14	6	
CV-250MD	250	10"	4.8	68	34	15	
CV-280MD	280	11"	4.8	77	34	15	
CV-380MD	380	15"	7.6	105	88	39	
CV-385MD	385	15 3/16"	4.8	110	34	15	
CV-400MD	400	15 3/4"	4.6	116	34	15	

0301 KSS EXTRA HIGH TEMPERATURE CABLE TIE



- Material: UL94V-2 flame rated, UL approved Nylon 46.
- Color: Light Brown.
- Application: One piece self-lock cable tie save the time and make effective for installation.
- Feature : Designed for extra high-temperature up to 150°C.

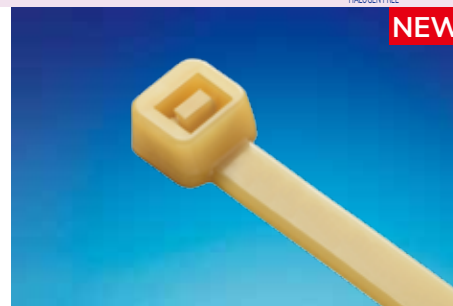

Item No.	Length		W mm	Max. Bundle Dia. mm	Min. LoopTensile Strength		Packing
	mm	inch			lbs	kgs	
CV-100N46	100	4"	2.5	22	18	8	100pcs
CV-150N46	150	6"	3.6	36	40	18	
CV-200N46	203	8"	4.6	52	50	22	
CV-300SN46	300	11 7/8"	4.8	83	50	22	
CV-380N46	380	15"	7.6	105	120	55	
CV-385N46	385	15 3/16"	4.8	110	50	22	