


0315 KSS RELEASABLE CABLE TIE

- Material: UL94V-2 flame rated, UL approved Nylon 66.
- Color: Black, Natural.
- Easily assembled by hand or with pliers, remain securely locked until intentionally released by operating the finger catch.



Item No.		Length		W	Max. Bundle Dia.	Min. Loop Tensile Strength		Packing
Black	Natural	mm	inch	mm	mm	lbs	kgs	
HV-125BK	HV-125	125	4 15/16"	7.6	30	50	22	100pcs
HV-150BK	HV-150	150	6"	7.6	35	50	22	
HV-200BK	HV-200	203	8"	7.6	50	50	22	
HV-250BK	HV-250	250	10"	7.6	65	50	22	
HV-300BK	HV-300	300	11 7/8"	7.6	80	50	22	
HV-500BK	HV-500	500	19 11/16"	8.5	145	75	34	

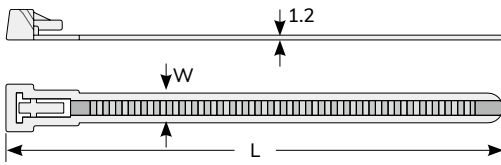

0315 KSS RELEASABLE CABLE TIE

- Material: UL94V-2 flame rated, UL approved Nylon 66.
- Color: Black, Natural.
- Easily assembled by hand or with pliers, remain securely locked until intentionally released by operating the finger catch.



Item No.		Length		W	Max. Bundle Dia.	Min. Loop Tensile Strength		Packing
Black	Natural	mm	inch	mm	mm	lbs	kgs	
HVC-125BK	HVC-125	125	4 15/16"	7.6	30	50	22	100pcs
HVC-150BK	HVC-150	150	6"	7.6	41	50	22	
HVC-200BK	HVC-200	203	8"	7.6	58	50	22	
HVC-250BK	HVC-250	250	10"	7.6	73	50	22	
HVC-300BK	HVC-300	300	11 7/8"	7.6	89	50	22	
HVC-370BK	HVC-370	370	14 5/8"	7.6	108	50	22	

