


0342 KSS CHASSIS TIE

● Material: UL94V-2 flame rated, UL approved Nylon 66.

Item No.	Length		W	Max. Bundle Dia.	Packing
	mm	inch			
KFC-300BK	304	11 7/8"	6.2	85	100pcs
KFC-380BK	380	15"	7.6	100	
KFS-380BK	380	15"	7.6	100	

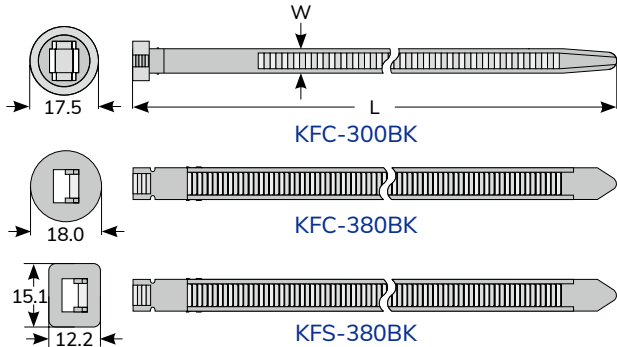

Wiring Ducts

Cable Markers


Cable Ties

Wrapping Bands

0343 KSS MOUNTING ADJUSTABLE TIE

- Material: UL94V-2 flame rated, UL approved Nylon 66.
- Application: Press the tie head against the bolt, which is fixed to the board panel, and fasten the cable by locking the tie.
- Feature: 1. Ladder Design Strap, which is adjustable.
2. Loose by rotating it counterclockwise.

Item No.	Length		W	Screw	Packing
	mm	inch			
MAT-120BK	120	4 3/4"	10	5.0	100pcs

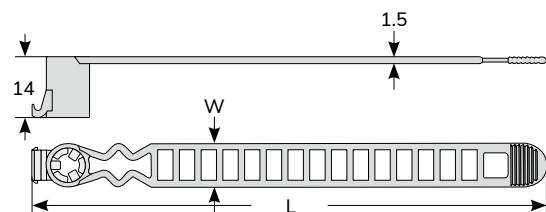

Cable Clamps & Tie Mounts

Glands, Bushings

Conduits



Bushings

Wire Connectors

0355 KSS NYLON CABLE TIE WITH STOPPER

- Material: UL94V-2 flame rated, UL approved Nylon 66.
- Feature: A stopper built on tie to ensure the minimum bundle loop.

Item No.	Length		W	Max. Bundle Dia.	Min. Loop Tensile Strength		Packing
	mm	inch			lbs	kgs	
CVS-140	142	5 1/2"	3.2	20	40	18	100pcs
CVS-190	190	7 1/2"	4.8	45	50	22	
CVS-380XL	380	15"	12.7	105	250	114	

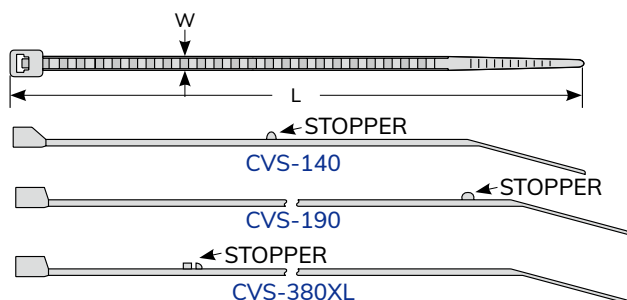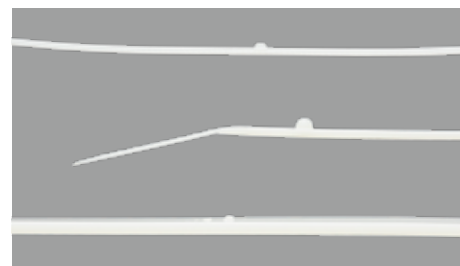

Tubes

Cable Clips

PCB Parts

Fasteners