


0715 KSS 扣式塞头 HOLE PLUG



单位：mm

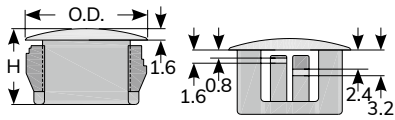

型 号 Item No.	铁板孔径 Mounting Hole		铁板厚度 Thickness	覆盖 外径 O.D.	高度 H	包 装 Packing
	mm	inch				
HP-5	5.0		1.8	6.3	5.9	100pcs
HP-6	6.0		2.5	7.8	7.8	
HP-8	7.9	5/16"	1.6	10.3	8.1	
HP-10	9.5	3/8"	3.2	13.0	10.5	
HP-13S	12.7	1/2"	3.2	14.5	10.1	
HP-13	12.7	1/2"	3.2	16.5	10.9	
HP-15	14.3	9/16"	3.2	16.7	10.3	
HP-16	15.9	5/8"	3.2	19.5	10.0	
HP-19	19.1	3/4"	3.2	22.9	10.0	
HP-22	22.2	7/8"	3.2	25.8	11.3	
HP-23	23.4		3.2	27.0	11.4	
HP-25	25.4	1"	3.2	29.0	11.6	
HP-30	30.1	1 3/16"	3.2	34.5	12.0	
HP-35	34.9	1 3/8"	3.2	38.1	14.3	
HP-38	38.1	1 1/2"	3.2	42.1	11.2	
HP-45	44.5	1 3/4"	3.2	49.7	11.8	
HP-45L	45.5		3.2	49.7	11.8	

NEW

材质：UL合格之NYLON 66 (黑色)，防火等级 94V-2。


用法：将铁板钻孔，再行压入即可。

用途：可作为预备孔或将多余孔塞平之用，保持盘面的美观。

0716 KSS 旋转式塞头 SCREW PLUG



单位：mm



METRIC 规格

型 号 Item No.	螺纹规格 Thread	螺纹外径 Thread O.D.	铁板孔径 Mounting Hole	O.D.	H	H1	包 装 Packing
MSP-12	M12x1.5	12	12.0+0.2	15.0	10.0	6.0	100pcs
MSP-16	M16x1.5	16	16.0+0.2	20.0	10.5	6.0	
MSP-20	M20x1.5	20	20.0+0.2	24.0	10.5	6.0	
MSP-25	M25x1.5	25	25.0+0.3	29.7	12.8	7.8	50pcs
MSP-32	M32x1.5	32	32.0+0.3	36.6	13.3	7.8	
MSP-40	M40x1.5	40	40.0+0.3	45.8	13.4	7.8	10pcs
MSP-50	M50x1.5	50	50.0+0.3	55.5	16.2	9.8	
MSP-63	M63x1.5	63	63.0+0.3	69.3	17.5	11.8	

材质：UL合格之NYLON 66 (黑色)，防火等级 94V-2，另备有灰色。

用途：可作为预备孔或将多余孔塞平之用，保持盘面的美观。

- 配线槽
- 配线标志
- 扎线带
- 结束带
- 固定座
- 固定头、浪管
- 保护部品
- 接线头
- 套管
- 固定夹
- PC板部品
- 扣具