



0720 KSS 護線環 GROMMET (OPEN / CLOSED)


單位：mm



GM TYPE



GMC TYPE



GM-1108

型號	Item No.	鐵板孔徑 Mounting Hole	鐵板厚度 Thickness	O.D.	I.D.	H	包裝 Packing
開口型	密合型						
GM-0603	GMC-0603	6.2	1.5	8.5	3.0	4.7	100pcs
GM-0705	GMC-0705	7.4	1.5	10.2	5.0	4.7	
GM-1006	GMC-1006	10.2	1.5	13.3	6.4	6.5	
GM-1108S	GMC-1108S	11.1	2.1	15.5	7.8	7.8	
GM-1108	GMC-1108	11.2	2.8	15.5	7.8	9.0	
GM-1410	GMC-1410	14.1	3.2	19.5	10.5	6.4	
GM-2015	GMC-2015	20.3	1.5	23.7	15.5	6.1	
GM-2518	GMC-2518	25.3	1.3	29.9	18.9	7.2	
GM-3225	GMC-3225	31.9	1.3	38.1	25.0	7.8	
GMQ-0603	GMCQ-0603	6.2	1.5	8.5	3.0	4.7	
GMQ-0705	GMCQ-0705	7.4	1.5	10.2	5.0	4.7	
GMQ-1006	GMCQ-1006	10.2	1.5	13.3	6.4	6.5	
GMQ-1108S	GMCQ-1108S	11.1	2.1	15.5	7.8	7.8	
GMQ-1108	GMCQ-1108	11.2	2.8	15.5	7.8	9.0	
GMQ-1410	GMCQ-1410	14.1	3.2	19.5	10.5	6.4	
GMQ-2015	GMCQ-2015	20.3	1.5	23.7	15.5	6.1	
GMQ-2518	GMCQ-2518	25.3	1.3	29.9	18.9	7.2	
GMQ-3225	GMCQ-3225	31.9	1.3	38.1	25.0	7.8	

材質：南亞軟質PVC (黑色)。


用途：開口型 - 使粗糙的鐵孔變成圓滑的出線孔。各種電線電纜之保護及絕緣。

密合型 - 可作為預備孔或將多餘孔塞平之用，保持盤面的美觀。

※GMQ及GMCQ材質較軟。

0725 KSS D型插座護蓋 D TYPE HOUSING COVER

單位：mm

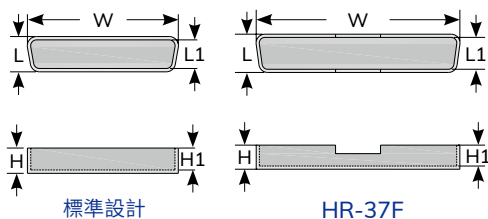

標準設計

HR-37F

型號	L	L1	W	H	H1	包裝 Packing	適用接頭 Suitable Socket
HR-9M	11.0	9.2	20.0	7.2	6.1	100pcs	9 pin 公
HR-9F	9.2	7.85	18.1	6.5	5.7		9 pin 母
HR-15M	10.9	9.1	28.2	7.0	6.0		15 pin 公
HR-15F	9.5	7.5	26.5	6.9	5.9		15 pin 母
HR-25M	10.9	9.1	42.0	7.3	6.3		25 pin 公
HR-25F	9.5	7.8	40.6	6.8	5.9		25 pin 母
HR-37F	10.9	8.3	57.5	7.5	6.5		37 pin 母

材質：PE (本色)。

用途：作為電腦傳輸線接頭之保護及防塵用。

配線槽
配線標誌
紮線帶
結束帶
固定座
固定頭、浪管
保護部品
接線頭
套管
固定夾
PC板部品
扣具