



0720 KSS 护线环 GROMMET (OPEN/CLOSED)


单位: mm



GM TYPE



GMC TYPE



GM-1108

型号	Item No.	铁板孔径 Mounting Hole	铁板厚度 Thickness	O.D.	I.D.	H	包装 Packing
开口型	密合型						
GM-0603	GMC-0603	6.2	1.5	8.5	3.0	4.7	100pcs
GM-0705	GMC-0705	7.4	1.5	10.2	5.0	4.7	
GM-1006	GMC-1006	10.2	1.5	13.3	6.4	6.5	
GM-1108S	GMC-1108S	11.1	2.1	15.5	7.8	7.8	
GM-1108	GMC-1108	11.2	2.8	15.5	7.8	9.0	
GM-1410	GMC-1410	14.1	3.2	19.5	10.5	6.4	
GM-2015	GMC-2015	20.3	1.5	23.7	15.5	6.1	
GM-2518	GMC-2518	25.3	1.3	29.9	18.9	7.2	
GM-3225	GMC-3225	31.9	1.3	38.1	25.0	7.8	
GMQ-0603	GMCQ-0603	6.2	1.5	8.5	3.0	4.7	100pcs
GMQ-0705	GMCQ-0705	7.4	1.5	10.2	5.0	4.7	
GMQ-1006	GMCQ-1006	10.2	1.5	13.3	6.4	6.5	
GMQ-1108S	GMCQ-1108S	11.1	2.1	15.5	7.8	7.8	
GMQ-1108	GMCQ-1108	11.2	2.8	15.5	7.8	9.0	
GMQ-1410	GMCQ-1410	14.1	3.2	19.5	10.5	6.4	
GMQ-2015	GMCQ-2015	20.3	1.5	23.7	15.5	6.1	
GMQ-2518	GMCQ-2518	25.3	1.3	29.9	18.9	7.2	
GMQ-3225	GMCQ-3225	31.9	1.3	38.1	25.0	7.8	

材质: 南亚软质PVC (黑色)。


用途: 开口型 - 使粗糙的铁孔变成圆滑的出线孔。各种电线电缆之保护及绝缘。

密合型 - 可作为预备孔或将多余孔塞平之用, 保持盘面的美观。

※GMQ及GMCQ材质较软。

0725 KSS D型插座护盖 D TYPE HOUSING COVER

单位: mm

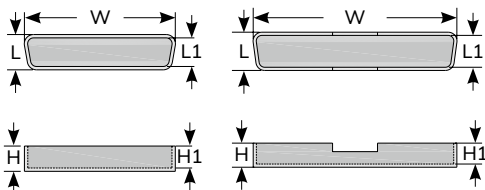

标准设计

HR-37F

型号	L	L1	W	H	H1	包装 Packing	适用接头 Suitable Socket
HR-9M	11.0	9.2	20.0	7.2	6.1	100pcs	9 pin 公
HR-9F	9.2	7.85	18.1	6.5	5.7		9 pin 母
HR-15M	10.9	9.1	28.2	7.0	6.0		15 pin 公
HR-15F	9.5	7.5	26.5	6.9	5.9		15 pin 母
HR-25M	10.9	9.1	42.0	7.3	6.3		25 pin 公
HR-25F	9.5	7.8	40.6	6.8	5.9		25 pin 母
HR-37F	10.9	8.3	57.5	7.5	6.5		37 pin 母

材质: PE (本色)。

用途: 作为电脑传输线接头之保护及防尘用。

配线槽
配线标志
扎线带
结束带
固定座
固定头、浪管
保护部品
接线头
套管
固定夹
PC板部品
扣具