


0809 KSS SCREW ON WIRE CONNECTOR




E 116091 236592

- Material: Steel with UL94V-2 flame rated thermoplastic cover.
- Two wing makes move easy twist on termination of wires.
- Strip wires before application.
- Rated at 600 volt max. for building wiring.
- Temp. 105°C (221°F)
- Spring design provided more secure connection.

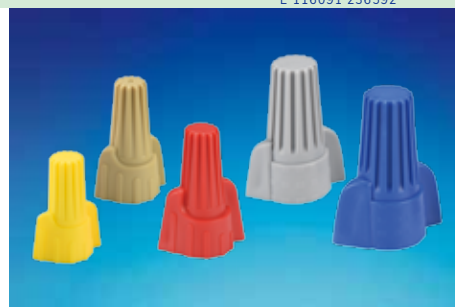

UNIT : mm

Item No.	I.D.	W	H	Wire Combination		Color	Packing
				JIS	AWG		
SW-Y11H	9.8	18.2	25.8	Max. 2 #3.5 w/1 #2.0 Min. 3 #0.75	Max. 2 #12 w/1 #14 Min. 3 #18	Yellow	100pcs
NEW SW-Y12PH	11.2	18.3	29.0	Max. 4 #3.5 Min. 3 #0.5 Sol	Max. 4 #12 Min. 3 #22 Sol	Brown	
SW-Y12H	13.0	23.0	31.8	Max. 5 #3.5 Sol Min. 3 #1.25	Max. 5 #12 Sol Min. 3 #16	Red	
SW-Y13H	14.9	25.5	33.3	Max. 3 #5.5 Min. 3 #2.0 w/1 #0.75	Max. 3 #10 Min. 3 #14 w/1 #18	Grey	
SW-Y14H	17.8	31.8	40.0	Max. 3 #8 w/1 #3.5 Min. 2 #5.5 w/1 #3.5	Max. 3 #8 w/1 #12 Min. 2 #10 w/1 #12	Blue	



0810 KSS MID-WAY WIRE CONNECTOR



HALOGEN FREE OPTION

- Material: Brass with PP / UL94V-2 flame rated, UL approved Nylon 66 cover.
- Insert wires on the grooves of connector, clamps down the plastic body and electricity can be conducted.
- Quick installation without stripping wire.
- Can be joined for connection



UNIT : mm

Item No.		Wire Combination	Connection	Color	Packing
PP	NYLON66				
KW-1	KW-1N	18AWG-14AWG		Blue	100pcs
KW-2	KW-2N	18AWG-14AWG		Blue	
KW-3	KW-3N	22AWG-18AWG		Red	
KW-4	KW-4N	18AWG-14AWG		Blue	
KW-5	KW-5N	12AWG-10AWG		Yellow	
KW-6	KW-6N	22AWG-20AWG		Red	
KW-6L	KW-6LN	18AWG-14AWG		Red	
	KW-10N	22AWG-18AWG		Red	
	KW-11N	16AWG-14AWG		Blue	
	KW-12N	12AWG-10AWG		Yellow	