


0611 KSS 尼龙螺帽 NYLON LOCK NUT

材质：UL合格之NYLON 66（黑色），防火等级 94V-2。

螺纹规格

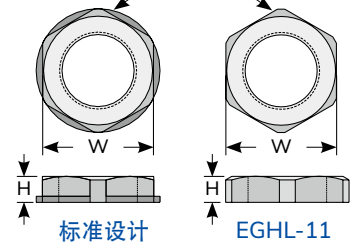

标准设计

EGH-11

METRIC 规格

型号 Item No.	螺纹规格 External thread	宽 W	高 H	包装 Packing
AGL-12	M12x1.25	17.0	5.2	50pcs
AGL-12L	M12x1.5	17.0	5.2	
AGL-16	M16x1.5	21.8	5.2	
AGL-20	M20x1.5	26.6	6.0	
AGL-25	M25x1.5	33.0	6.7	25pcs
AGL-32	M32x1.5	41.7	8.0	
AGL-40	M40x1.5	48.3	9.0	
AGL-50	M50x1.5	58.8	9.8	10pcs
AGL-63	M61x1.5	66.0	10.8	
AGL-63L	M63x1.5	73.0	11.0	

PG 规格

单位：mm

型号 Item No.	螺纹规格 External thread	宽 W	高 H	包装 Packing
EGL-7	PG7	19.1	5.1	50pcs
EGL-7LS	PG7	15.6	5.1	
EGL-9	PG9	21.0	5.1	
EGL-11	PG11	24.0	5.1	
EGL-13.5	PG13.5	27.0	6.1	
EGL-16	PG16	30.0	6.1	
EGL-21	PG21	36.0	7.1	25pcs
EGL-29	PG29	46.2	8.0	
EGL-36	PG36	58.3	7.8	
EGL-42	PG42	65.0	7.8	10pcs
EGL-48	PG48	69.5	7.8	
EGH-11	PG11	23.9	5.2	50pcs

PF 规格 (G牙)

型号 Item No.	螺纹规格 External thread	宽 W	高 H	包装 Packing
AGL-20F	PF 1/2"	26.2	6.6	50pcs
AGJL-14	PF 1/4"	17.0	5.1	50pcs
AGJL-17	PF 3/8"	22.0	5.2	
AGJL-21	PF 1/2"	27.0	6.1	
AGJL-58	PF 5/8"	26.8	6.0	
AGJL-27	PF 3/4"	33.0	7.1	25pcs
AGJL-34	PF 1"	41.6	8.1	
AGJL-112	PF 1 1/2"	58.5	9.8	10pcs
AGJL-2	PF 2"	72.3	10.8	

NPT 规格

型号 Item No.	螺纹规格 External thread	宽 W	高 H	包装 Packing
NPTL-14	NPT 1/4"	17.0	5.1	50pcs
NPTL-38	NPT 3/8"	22.0	5.2	
NPTL-12	NPT 1/2"	27.0	6.1	
NPTL-34	NPT 3/4"	33.0	7.1	
NPTL-1	NPT 1"	42.2	8.1	25pcs
NPTL-114	NPT 1 1/4"	48.8	9.0	10pcs

0612 KSS 电缆固定头内塞塞头 NYLON CABLE GLAND SEALING PLUG


单位：mm



型号 Item No.	O.D	O.D1	H	适用固定头	包装 Packing
BPA-060	10.2	6.0	15.5	AG-12, EG-7, AGJ-14, NPT-14系列	50pcs
BPA-095	15.6	9.5	15.5	AG-16, EG-11, AGJ-17, NPT-38系列	
BPA-135	19.6	13.5	16.5	AG-20, EG-16, AGJ-21, NPT-12系列	
BPA-175	24.4	17.5	17.0	AG-25, EG-21, AGJ-27, NPT-34系列	25pcs
BPA-245	32.5	24.5	17.2	AG-32, EG-29, AGJ-34, NPT-1系列	
BPA-315	41.5	31.5	17.6	AG-40, NPT-114, EG-36系列	10pcs
BPA-389	47.2	38.9	17.6	AG-50, EG-42系列	
BPA-435	52.5	43.5	18.6	AG-63系列	

材质：UL合格之NYLON 66（黑色），防火等级 94V-2。

用途：各式设备搭配电缆固定头使用时，在配线前，可先安装内塞塞头，以免尘、水渗入。



配线槽
配线标志
扎线带
结束带
固定座
固定头、浪管
保护部品
接线头
套管
固定夹
PC板部品
扣具