


# 0620 KSS FLEXIBLE CONDUIT



- Material: PE(EVA available)
- For running cable protection in Electrical/Machinery/Building Harness wiring.
- Flexible body facilitate your corner/elbow wiring.

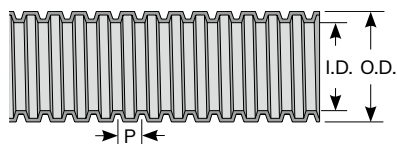

● Close design


UNIT : mm

Item No.	I.D.	O.D.	P	Suitable Adaptor	Packing
BG-10P	7.4±0.4	10.2±0.4	2.6±0.3	BG-10	300M
BG-14P	10.7±0.4	14.1±0.4	2.6±0.3	BG-14	100M
BG-16P	10.7±0.4	16.0±0.4	3.2±0.4	BG-16, BGQ-16	
BG-18P	13.8±0.4	17.5±0.4	3.2±0.4	BG-18, BGQ-18	
BG-20P	14.1±0.4	20.0±0.4	3.8±0.4	BG-20, BGQ-20	
BG-22P	17.2±0.4	22.0±0.4	3.2±0.4	BG-22, BGQ-22	
BG-25P	18.3±0.4	25.0±0.4	4.3±0.4	BG-25, BGQ-25	
BG-26P	21.2±0.4	25.8±0.4	3.2±0.4	BG-26, BGQ-26	50M
BG-32P	24.3±0.4	32.0±0.4	5.0±0.5	BG-32, BGQ-32	
BG-34P	28.7±0.4	34.0±0.4	3.2±0.4	BG-34, BGQ-34	
BG-40P	31.2±0.4	40.0±0.4	5.8±0.5	BG-40	
BG-42P	34.9±0.4	42.0±0.4	3.2±0.4	BG-42	
BG-48P	40.0±0.5	48.0±0.5	4.6±0.4	BG-48	
BG-50P	39.6±0.5	50.0±0.5	7.4±0.6	BG-50	30M
BG-55P	47.5±0.4	54.5±0.5	3.2±0.4		
BG-60P	52.0±0.5	60.0±0.5	6.2±0.5		
BG-76P	62.0±0.5	76.0±0.5	6.2±0.5		

# 0620 KSS NYLON FLEXIBLE CONDUIT



- Material: UL94HB flame rated Nylon 6.
- Color: Black
- For running cable protection in Electrical/Machinery/Building Harness wiring.
- Flexible body facilitate your corner/elbow wiring.

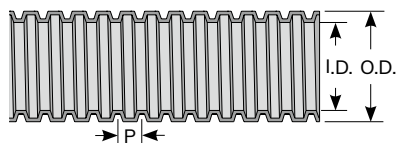

UNIT : mm

Item No.		Trade Size	I.D.	O.D.	P	Suitable Adaptor	Packing
Close design	Split design	Inch					
PA-07	PAO-07	1/4"	6.0±0.25	9.8±0.35	3.3±0.4	PAQ-0707, PAQ-0709	50M
PA-10	PAO-10	5/16"	9.0±0.25	13.0±0.35	3.0±0.4	PAQ-1009	
PA-12	PAO-12	3/8"	11.4±0.35	15.5±0.35	3.0±0.4	PAQ-1209, PAQ-1211, PAQ-12135, PAQ-1216	
PA-17	PAO-17	1/2"	16.3±0.35	21.6±0.45	3.3±0.4	PAQ-17135, PAQ-1716, PAQ-1721	
PA-23	PAO-23	3/4"	22.4±0.45	28.2±0.45	3.6±0.4	PAQ-2321	
PA-29	PAO-29	1"	27.9±0.45	34.0±0.45	3.6±0.4	PAQ-2929	
PA-36	PAO-36	1 1/4"	35.8±0.45	42.4±0.6	3.3±0.4	PAQ-3636	25M
PA-48	PAO-48	2"	47.5±0.6	54.5±0.6	3.0±0.4	PAQ-4848	