


# 0703 KSS EDGING GROMMET

- Material: PE
- Color: Natural.
- Cut length optionally to fit your chassis edging protection or other application for smoothing edges.
- Protect wires, cables and chassis insulation.


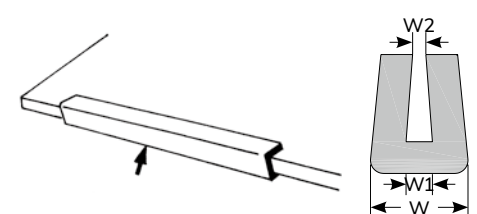


UNIT : mm

Item No.	W	W1	W2	Chassis Thickness	Packing
ED-010	3.3	1.0	0.5	under 1.0	10M
ED-012	3.4	1.2	0.6	1.0~1.2	
ED-016	4.6	1.6	0.9	1.2~1.6	
ED-020	4.5	2.0	1.1	1.6~2.0	
ED-024	5.1	2.4	1.2	2.0~2.4	
ED-032	5.8	3.2	1.5	2.4~3.2	
ED-055	7.9	5.5	4.5	4.5~5.5	

# 0705 KSS STRAIN RELIEF BUSHING

- Material: UL94V-2 flame rated, UL approved Nylon 66.
  - Color: Black
  - Cuts assembly cost, prolongs cords life. Used extensively for protecting cords of computer, apparatus, etc.
- ※Application Tool: KT-1

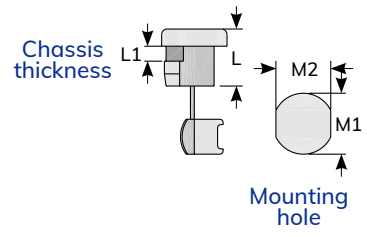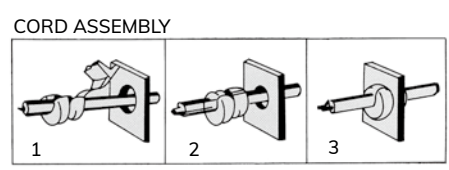

UNIT : mm

Item No.	Cross Section Shape	Wires Accommodate		Mounting Hole		Part L L	Chassis Thickness L1	Packing
		UL Wire	Size	M1	M2			
SR-F21	Flat	SPT-1 2C #18	2.3X4.5 / 2.8X5.3	9.5	8.7	10.3	0.5-1.6	100pcs
SR-F23		SPT-1 2C #18	2.3X4.5 / 2.8X5.3	9.5	8.7	10.3	1.8-3.2	
SR-F31		SPT-1 2C #18	3.0X5.6	11.2	9.9	10.3	1.0-1.6	
SR-F32		SPT-1 2C #18	3.0X5.6	11.0	9.9	10.3	1.9-2.5	
SR-F41		SPT-2 2C #18	3.0X7.1 / 3.8X7.6	12.7	11.8	10.3	0.5-1.6	
SR-F42		SPT-2 2C #18	3.0X7.1 / 3.8X7.6	12.7	11.8	10.3	1.8-2.5	
SR-F51		SPT-3 2C #18	5X10.4	14.3	12.9	15.2	0.5-1.6	
SR-F53		SPT-3 2C #18	5X10.4	14.3	12.9	15.2	1.8-3.5	
SR-F83			6X15.2	21.6	21.3	20.4	2.0-3.4	
SR-5R1		Round	SVT 3C #18	Ø6.2~Ø7.4	12.8	11.5	11.0	
SR-5R2	SVT 3C #18		Ø6.2~Ø7.4	13.0	11.5	11.0	1.8-2.5	
SR-6W2	SJT 3C #18		Ø7.6	12.8	11.8	11.0	1.8-2.3	
SR-6P1	SJT 3C #18		Ø7.4~Ø8.2	15.9	14.0	14.8	0.5-1.6	
SR-6P3	SJT 3C #18		Ø7.4~Ø8.2	15.9	14.0	14.8	1.9-3.2	
SR-6R1	SJT 3C #16		Ø8.2~Ø9.2	15.9	14.0	14.8	0.5-1.6	
SR-6R3	SJT 3C #16		Ø8.2~Ø9.2	15.9	14.0	14.8	1.9-3.2	
SR-7R1	SJT 3C #14		Ø9.2~Ø10.5 / Ø11	19.9	17.0	19.0	0.5-1.6	
SR-7R3	SJT 3C #14		Ø9.2~Ø10.5 / Ø11	19.7	17.0	19.0	1.9-3.2	
SR-8R3	SJT 3C #14		Ø12~Ø15.2	21.6	21.3	20.6	1.9-3.2	
SR-9R1	#18 20~30 pcs		Ø11~Ø15	15.0	19.0	17.5	0.5-1.6	
SR-9R7	SJT 3C #10		Ø15.2~Ø16.3 / Ø17.5	28.0/30.2	25.5	25.2	1.0-3.2	