



# 0505 KSS 黏式配線固定座 SELF ADHESIVE TIE MOUNT




無鹵素 環保  
單位：mm




HC-26T




HC-100




HC-101S




HC-101




HC-101SA,102A




HC-102




HC-103




HC-25



HC-19R, 26R



HC-18T



HC-3838

| 型號<br>Item No. | L    | W    | 帶孔<br>W1 | H   | 固定孔<br>M | 包裝<br>Packing |
|----------------|------|------|----------|-----|----------|---------------|
| ※ HC-100-S4    | 12.5 | 12.5 | 3.2      | 3.2 |          | 100pcs        |
| ※ HC-101S-S2   | 19.5 | 19.5 | 4.6      | 3.9 | 3.2      |               |
| HC-101S        | 19.5 | 19.5 | 4.6      | 3.9 | 3.2      |               |
| HC-101         | 21.8 | 21.8 | 4.8      | 4.0 |          |               |
| NEW HC-101SA   | 19.0 | 19.0 | 4.0      | 4.5 | 3.4      |               |
| HC-102         | 28.6 | 28.6 | 5.5      | 5.3 | 5.0      |               |
| NEW HC-102A    | 28.0 | 28.0 | 5.3      | 5.6 | 5.6      |               |
| HC-103         | 29.2 | 29.2 | 5.5      | 5.4 | 5.0      |               |
| HC-25          | 26.1 | 26.1 | 8.0      | 6.0 | 4.3      |               |
| HC-19R         | 18.9 | 18.9 | 4.2      | 4.6 | 4.8      |               |
| HC-26R         | 26.3 | 26.3 | 5.6      | 6.0 | 5.0      |               |
| HC-18T         | 19.0 | 19.0 | 4.1      | 5.0 | 4.4      |               |
| HC-26T         | 26.5 | 26.5 | 5.8      | 7.4 | 4.3      |               |
| HC-3838        | 38.5 | 38.5 | 10.2     | 7.6 | 5.0      |               |

材質：UL合格之NYLON66 本色 (另備黑色)，防火等級94V-2，底座背膠。  
用法：將底座背膠離型紙撕去，接著將固定座貼於鐵板上，再以紮線帶固定電線，可省去面板鑽孔之麻煩。

※HC-100-S4：4連式 (特殊設計，離型紙容易剝離)


※HC-101S-S2：2連式 (特殊設計，離型紙容易剝離)

適用之紮線帶：紮線帶寬度小於帶孔(W1)者。

# 0510 KSS 紮線固定座 SADDLE TYPE TIE MOUNT




無鹵素 環保  
單位：mm

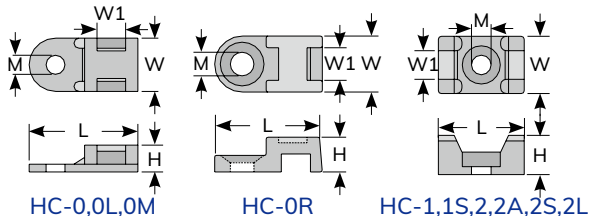

HC-0,0L,0M

HC-0R

HC-1,1S,2,2A,2S,2L

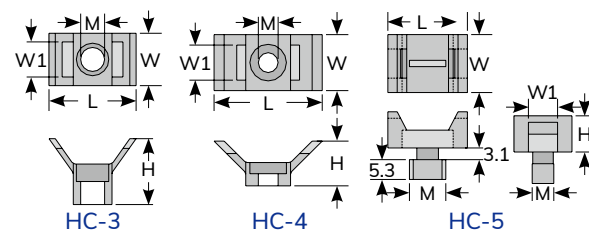

HC-3

HC-4

HC-5

| 型號<br>Item No. | L    | W    | 帶孔<br>W1 | H    | 固定孔<br>M | 包裝<br>Packing |
|----------------|------|------|----------|------|----------|---------------|
| HC-0           | 19.6 | 9.5  | 5.2      | 5.0  | 3.7      | 100pcs        |
| HC-0M          | 19.0 | 9.5  | 5.0      | 5.0  | 4.3      |               |
| HC-0L          | 19.0 | 9.5  | 5.0      | 5.0  | 5.2      |               |
| HC-0R          | 19.1 | 10.0 | 5.4      | 6.2  | 4.2      |               |
| HC-1           | 15.0 | 10.0 | 5.1      | 7.0  | 3.5      |               |
| HC-1S          | 12.8 | 7.0  | 4.0      | 5.8  | 3.3      |               |
| HC-2S          | 23.0 | 16.0 | 9.0      | 9.8  | 5.0      |               |
| HC-2           | 23.0 | 16.0 | 9.0      | 9.8  | 6.3      |               |
| HC-2A          | 20.5 | 17.1 | 10.4     | 10.4 | 6.0      |               |
| HC-2L          | 23.0 | 16.0 | 9.0      | 9.8  | 6.5      |               |
| HC-3           | 23.0 | 13.8 | 9.5      | 17.5 | 5.3      |               |
| HC-4           | 30.0 | 14.7 | 9.3      | 11.6 | 5.0      |               |
| HC-5           | 21.5 | 16.0 | 7.8      | 10.0 | 9.7X5.8  |               |

材質：UL合格之NYLON 66 本色 (另備黑色)，防火等級 94V-2。

用法：先將固定座以螺絲固定，再以紮線帶固定電線。馬鞍形設計使電線易於固定。

適用之紮線帶：紮線帶寬度小於帶孔(W1)者。

※HC-5需插入固定孔旋轉卡住。