


## 1201 KSS WIRE SADDLE



- Material: **UL94V-0** flame rated, UL approved Nylon 66.
- Color: White

UNIT : mm

| Item No.   | Dimension |     |     |     | Mounting Hole<br>M1 | Thickness<br>T1 | Packing |
|------------|-----------|-----|-----|-----|---------------------|-----------------|---------|
|            | L         | W1  | H1  | H2  |                     |                 |         |
| JWS-0402V0 | 5.0       | 4.5 | 5.1 | 2.8 | 3.5                 | 0.5~1.6         | 100pcs  |
| JWS-0504V0 | 5.1       | 5.3 | 6.3 | 4.4 | 3.5                 | 0.5~1.6         |         |




## 1201 KSS WIRE SADDLE



- Material: JWB-0706, JWS-0910 with **UL94V-2** flame rated, UL approved Nylon 66 Natural color.

UNIT : mm

| Item No. | Dimension |     |      |      | Mounting Hole<br>M1 | Thickness<br>T1 | Packing |
|----------|-----------|-----|------|------|---------------------|-----------------|---------|
|          | L         | W1  | H1   | H2   |                     |                 |         |
| JWB-0706 | 4.0       | 7.7 | 9.7  | 6.4  | 3.0                 | 1.6             | 100pcs  |
| JWS-0910 | 4.0       | 9.3 | 13.4 | 10.7 | 3.5                 | 1.0             |         |

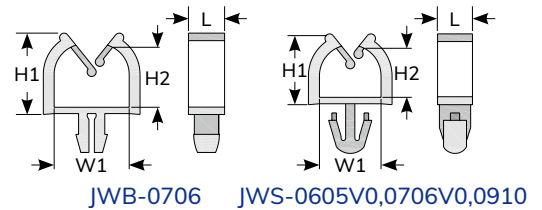

- Material: JWS-0605V0, JWS-0706V0 with **UL94V-0** flame rated, UL approved Nylon 66 White color.

UNIT : mm

| Item No.   | Dimension |     |     |     | Mounting Hole<br>M1 | Thickness<br>T1 | Packing |
|------------|-----------|-----|-----|-----|---------------------|-----------------|---------|
|            | L         | W1  | H1  | H2  |                     |                 |         |
| JWS-0605V0 | 3.8       | 6.6 | 7.8 | 5.0 | 3.5                 | 1.6             | 100pcs  |
| JWS-0706V0 | 3.8       | 7.9 | 9.7 | 6.4 | 3.5                 | 1.6             |         |

## 1201 KSS LOCKING WIRE SADDLE



- Material: **UL94V-2** flame rated, UL approved Nylon 66.
- Color: Natural
- Application: Pre-drill 4.8mm hole PC board and fix the wire saddle, lock the wire in saddle with fingertip pressure. Can directing and gathering cable in any direction.

UNIT : mm

| Item No. | Dimension |      |      |      | PCB                 |                 | Packing |
|----------|-----------|------|------|------|---------------------|-----------------|---------|
|          | W1        | H1   | H2   | H3   | Mounting Hole<br>M1 | Thickness<br>T1 |         |
| KWS-0    | 11.0      | 13.0 | 4.0  | 9.0  | 4.8                 | 2.0             | 100pcs  |
| KWS-1    | 11.0      | 19.0 | 10.5 | 14.2 | 4.8                 | 2.0             |         |
| KWS-2    | 11.0      | 27.0 | 19.0 | 23.0 | 4.8                 | 2.0             |         |
| KWS-2L   | 10.4      | 18.0 | 12.0 | 15.0 | 4.8                 | 4.0             |         |
| KWS-3    | 11.0      | 35.8 | 28.0 | 31.1 | 4.8                 | 2.0             |         |

