



1202 KSS LOCKING WIRE SADDLE




- Material: UL94V-2 flame rated, UL approved Nylon 66.
- Color: Natural
- Application: Pre-drill 4.8mm hole PC board and fix the wire saddle, lock the wire in saddle with fingertip pressure. Can directing and gathering cable in any direction.



UNIT : mm

Item No.	Dimension				PCB		Packing
	W1	H	H1	H2	Mounting Hole M1	Thickness T1	
KWS-0N	11.0	12.7	9.2	4.0	4.8	2.0	100pcs
KWS-1N	11.0	17.9	14.8	9.6	4.8	2.0	
KWS-2N	11.3	26.7	23.4	18.4	4.8	2.0	
KWS-3N	11.0	34.8	31.3	26.2	4.8	2.0	
KWS-1114	10.7	21.2	17.8	13.7	4.8	2.4	

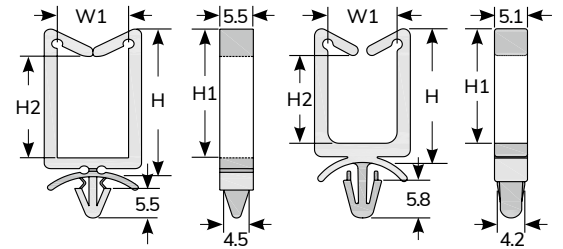

KWS-0N,1N,2N,3N

KWS-1114

1202 KSS LOCKING WIRE SADDL




- Material: UL94V-2 flame rated, UL approved Nylon 66.
- Color: Natural
- Application: Pre-drill hole on PC board and fix the wire saddle, lock the wire in saddle with fingertip pressure. Can directing and gathering cable in any direction.




UNIT : mm


Item No.	Dimension			PCB		Packing
	W	W1	H2	Mounting Hole M1	Thickness T1	
KWS-0506	9.0	5.0	5.4	4.8	3.0	100pcs
KWS-1106	13.0	10.5	5.4	4.8	1.6	
KWS-1110	14.4	10.9	9.8	As Figure	2.2	
KWS-1308	17.2	12.7	8.5	5.8	1.6	
KWS-1310	18.8	13.0	9.9	As Figure		
KWS-2314	28.3	22.9	13.6	4.8	3.4	




KWS-0506




KWS-1106



To fit hole




KWS-1308



KWS-1310

To fit hole



KWS-2314