


1204 KSS WIRE SADDLE

- Material: UL94V-2 flame rated, UL approved Nylon 66.
- Color: Natural

UNIT : mm

Item No.	Dimension		PCB		Packing
	W1	H1	Mounting Hole M1	Thickness T1	
RH-5	5.1	8.0	5.5	2.0	100pcs
RH-6	6.2	9.5	8.0	1.8	
RH-8	7.5	11.5	6.2	2.0	
RH-9	9.6	18.0	9.5	2.0	


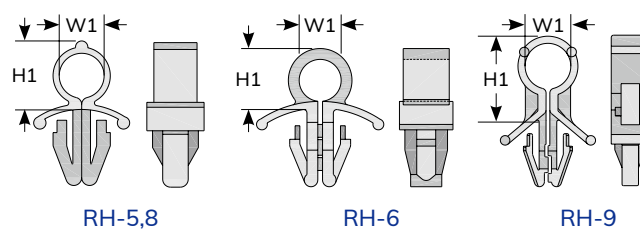


1204 KSS WIRE SADDLE

- Material: UL94V-2 flame rated, UL approved Nylon 66.
- Color: Natural

UNIT : mm

Item No.	Dimension H2	PCB		Packing
		Mounting Hole M1	Thickness T1	
RWS-6	6.2	6.0	2.0	100pcs
RWS-7	7.0	7.8	2.0	

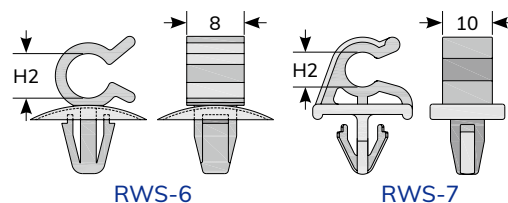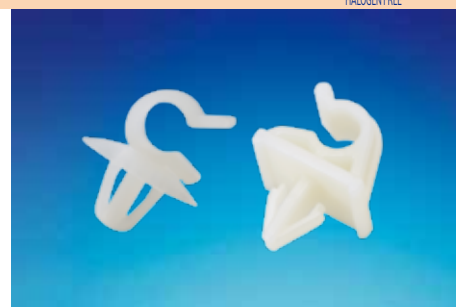

1204 KSS DOUBLE ROUTING CLIP

- Material: UL94V-2 flame rated, UL approved Nylon 66.
- Color: Natural

UNIT : mm

Item No.	W1	H1	PCB		Packing
			Mounting Hole M1	Thickness T1	
DR-6	6.2	7.7	3.2	2.0	100pcs

