


1204 KSS WIRE SADDLE

- Material: UL94V-2 flame rated, UL approved Nylon 66.
- Color: Natural

UNIT : mm

| Item No. | H1 | H2 | PCB | | Packing |
|----------|-----|-----|------------------|--------------|---------|
| | | | Mounting Hole M1 | Thickness T1 | |
| LWS-5 | 7.8 | 5.4 | 4.0 | 2.4 | 100pcs |




1205 KSS CLIP TWIST TIE

- Material: UL94V-2 flame rated, UL approved Nylon 66.
- Color: Natural

UNIT : mm

| Item No. | Dimension | | | Packing |
|----------|-----------|-----|------|---------|
| | W1 | H1 | H2 | |
| CTT-17 | 16.7 | 4.2 | 30.5 | 100pcs |




1205 KSS STANDOFF TWIST TIE

- Material: UL94V-2 flame rated, UL approved Nylon 66.
- Color: Natural
- Locking into pre-drilled hole, Insert cables and twist on to fix.

UNIT : mm

| Item No. | Dimension | | | Mounting Hole M1 | Thickness T1 | Packing |
|----------|-----------|------|------|------------------|--------------|---------|
| | W1 | H1 | H2 | | | |
| ST-1 | 6.0 | 31.7 | 19.5 | 4.6~4.8 | 1.0~2.8 | 100pcs |
| ST-2 | 11.0 | 21.2 | 27.8 | 4.8~5.0 | 1.0~2.8 | |
| ST-3 | 10.4 | 4.7 | 27.3 | 4.6~4.8 | 1.0~2.8 | |
| ST-3B | 11.0 | 5.0 | 28.0 | 6.2~6.6 | 0.5~2.0 | |
| ST-3C | 15.0 | 5.0 | 32.0 | 4.6~4.8 | 0.5~1.6 | |
| ST-3D | 18.0 | 5.3 | 36.2 | 4.4~4.8 | 1.0~2.4 | |
| ST-4S | 11.0 | 13.0 | 27.9 | 4.2~4.8 | 1.0~2.4 | |
| ST-4 | 15.0 | 13.1 | 31.3 | 4.6~4.8 | 1.0~2.0 | |
| ST-0560 | 5.0 | 60.9 | 20.5 | 4.6~5.0 | 1.6~3.0 | |
| ST-0605 | 6.1 | 5.3 | 19.3 | 4.0~4.4 | 2.4 | |
| ST-0701 | 7.0 | 1.3 | 22.0 | 4.6~4.8 | 1.0~2.8 | |
| ST-1112 | 11.0 | 15.3 | 26.8 | 4.6~4.8 | 1.6~3.0 | |
| ST-1247 | 11.0 | 50.5 | 27.2 | 4.6~4.8 | 1.6~3.0 | |
| ST-1303 | 13.5 | 3.0 | 45.0 | 6.6 | 1.8~3.6 | |
| ST-1602 | 16.0 | 5.1 | 31.7 | 4.4~4.6 | 0.5~1.6 | |
| ST-2005 | 20.0 | 5.1 | 36.5 | 7.2~7.6 | 1.8~3.6 | |
| ST-2403 | 23.5 | 3.2 | 44.2 | 4.8~5.0 | 0.5~2.6 | |

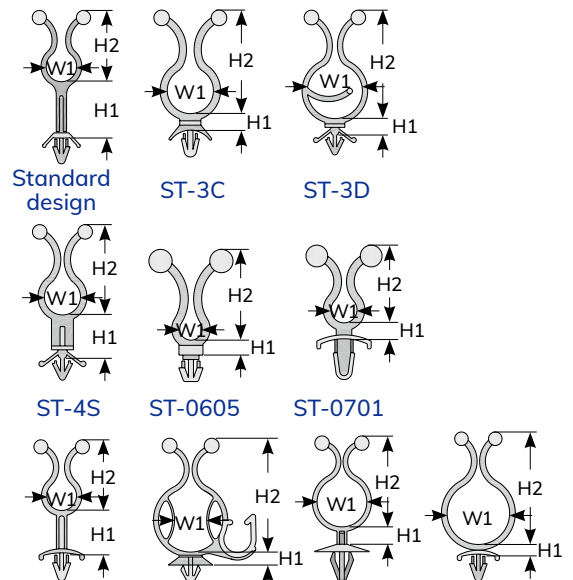

ST-1112,1247 ST-1303 ST-2005 ST-2403