


1107 KSS PC板隔離頂柱 PUSH SPACER




型號 Item No.	間距 H1	適用PC板		包裝 Packing
		鑽孔 M1	板厚 T1	
PS-5	4.8	4.8	2.0	100pcs
PS-6	6.4			
PS-10	9.6			
PS-13	12.7			
PS-16	15.9			
PS-19	19.1			
PS-22	22.2			
PS-25	25.4			
PS-28	28.5			
PS-36	35.0			

材質：UL合格之NYLON 66 (本色)，防火等級 94V-2。
 用途：支撐 PC板用，增加 PC板穩定。
 用法：先將基板鑽孔 4.8mm，再將隔離頂柱插入基板孔即可。


配線槽
配線標誌
紮線帶
結束帶
固定座
固定頭、浪管
保護部品
接線頭
套管
固定夾
PC板部品
扣具

1108 KSS 推式隔離柱 PCB EDGE SPACER

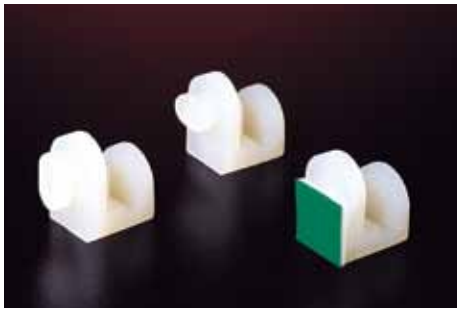


型號 Item No.	L1	W	H	H1	B	包裝 Packing
ES-5A	5.5	9.5	10.3	5.4	2.2	100pcs
ES-6A	9.0	8.7	10.8	6.0	1.9	
ES-6M	9.3	9.5	10.7	5.8	2.2	
ES-6P	9.0	8.7	10.8	6.0	1.9	
ES-6V	9.0	8.7	10.8	6.0	1.9	
ES-8U	6.7	9.8	13.3	8.4	2.0	


材質：UL合格之 NYLON 66 (本色)，防火等級 94V-2。
 用途：固定PC板，拆卸容易。




ES-5A 背膠




ES-6A 背膠




ES-6M



ES-6P



ES-6V

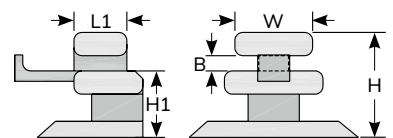

ES-8U