



# 0511 KSS 壁虎型固定座 WALL PLUG MOUNT

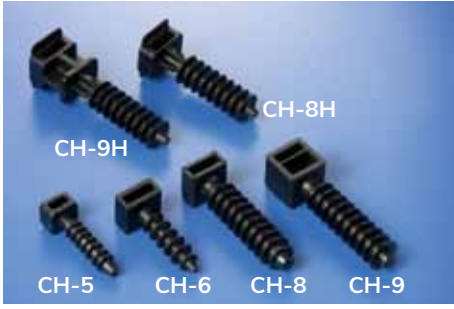

| 型號<br>Item No.   | 尺寸 Dimension |      |      | 適用孔徑<br>Mounting Hole | 包裝<br>Packing |
|------------------|--------------|------|------|-----------------------|---------------|
|                  | W1           | H1   | H2   |                       |               |
| CH-5             | 5.8          | 6.1  | 24.4 | 5                     | 100pcs        |
| CH-6             | 9.9          | 6.3  | 24.7 | 6                     |               |
| <b>NEW</b> CH-6A | 5.8          | 6.0  | 24.7 | 6                     |               |
| <b>NEW</b> CH-7  | 9.8          | 6.3  | 31.5 | 7                     |               |
| CH-8             | 9.7          | 6.3  | 37.5 | 9                     |               |
| <b>NEW</b> CH-8A | 10.0         | 6.1  | 34.1 | 8                     |               |
| CH-8H            | 9.4          | 5.9  | 36.0 | 9                     |               |
| CH-9             | 9.7          | 13.0 | 36.2 | 9                     |               |
| CH-9H            | 9.6          | 15.2 | 36.1 | 9                     |               |

材質：UL合格之NYLON 66 (黑色)，防火等級 94V-2。  
用法：先於牆面或木板鑽孔，然後將其敲入牆面，再以紮線帶固定電線。

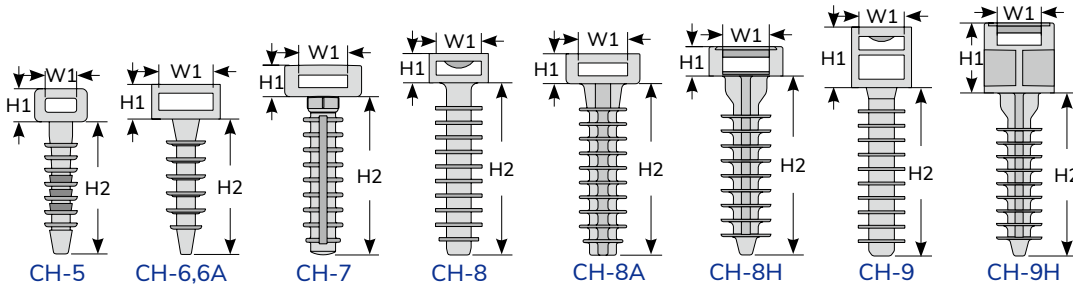

# 0511 KSS 壁虎 WALL PLUG



| 型號<br>Item No. | 尺寸 Dimension |       | 適用孔徑<br>Mounting Hole | 包裝<br>Packing |
|----------------|--------------|-------|-----------------------|---------------|
|                | H1           | H2    |                       |               |
| CWP-38         | 6.85         | 30.65 | 8.0                   | 100pcs        |

材質：UL合格之NYLON 66 (黑色)，防火等級 94V-2。  
用法：先於牆面鑽8mm圓洞，然後將其敲入牆面，再配合PMB-145、PMB-240使用，即可輕鬆在牆面固定電線。

