

1108 KSS PC板隔離柱 PCB SUPPORT




無鹵素 環保

單位：mm



型號 Item No.	L	H	H1	B	包裝 Packing
EB-9	13.5	13.6	8.7	1.8	100pcs

材質：UL合格之 NYLON66 (本色)，防火等級 94V-2。



1109 KSS 平底隔離柱 PCB SUPPORT



無鹵素 環保


單位：mm



型號 Item No.	O.D.	間距 H1	H2	適用PC板		包裝 Packing
				鑽孔 M1	板厚 T1	
BMS-5	11.8	5.6	9.5	4.0	2.0	100pcs
BMS-5B	9.7	5.6	9.5	4.0		
BMS-5L7	7.1	5.6	9.5	4.8		
BMS-5L	11.8	5.6	9.5	4.8		
BMS-7	11.8	6.5	9.5	4.0		
BMS-8	11.8	8.0	9.5	4.0		
BMS-11	12.0	11.0	9.0	4.0		
HMS-6	7.0	6.0	5.0	4.8		

材質：UL合格之 NYLON 66 (本色)，防火等級 94V-2。

用途：用於無法鑽孔之機板與PC板間的固定。

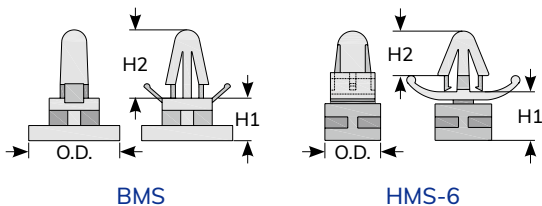

BMS

HMS-6