





0101 KSS WIRING DUCT (SLOTTED)


- Material: **UL94V-0** and **M1** flame rated, UL approved PVC.
- Color: Grey.
- PVC service temperature: 85°C
- UL Test up to 50°C
- Double Score lines: The restricted slot, sidewall design is scored at the base of each finger and the base of duct. It is easy for the user to break finger from the base to enlarge bundle of wire.
- Pinch Points: To separate the wires from top and bottom to avoid the wires tangled.
- Narrow and Larger Fingers: Both are available to supply the installer for different application.
- Outward sidewall design: Provide the resistance to prevent the cover/lid slipping off.
- ※ The standard wiring duct can be available for non-slip cover, suitable for vertical installations. The item number please specify for example,
Item no. : MPD-2550→MPQ-2550, PD-2550→PQ-2550,
MID-2530→MIQ-2530, HID-2560→HIQ-2560
Non-slip cover for the size less than 20mm width or bigger than 125mm is available upon request.

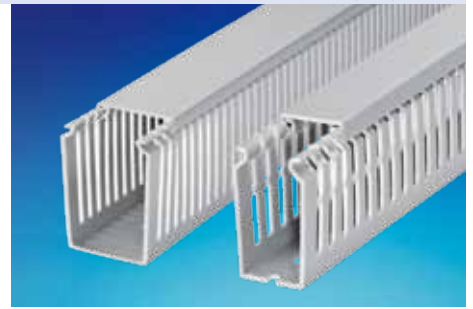


MPD SLOT : 8mm

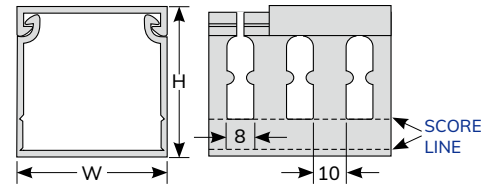


PD SLOT : 5mm

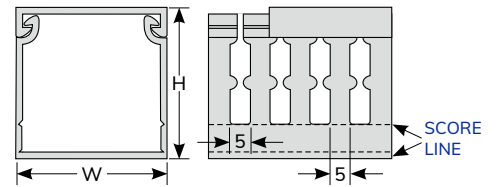

MID SLOT : 8mm

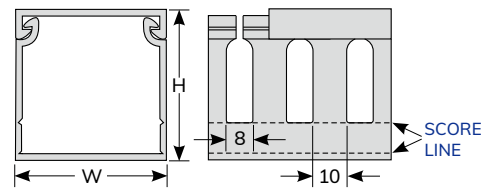

HID SLOT : 4mm

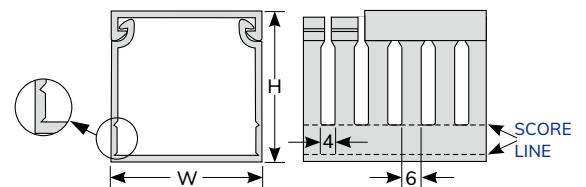

Item No.				W x H	Length
SLOT					
8mm	5mm	8mm	4mm	mm	
		MID-2530		25 X 30	2M
		MID-2540		25 X 40	
MPD-2550	PD-2550			25 X 50	
			HID-2560	25 X 60	
MPD-2575	PD-2575			25 X 75	
			HID-2580	25 X 80	
			HID-4080	40 X 80	
MPD-5050	PD-5050			50 X 50	
MPD-5075	PD-5075			50 X 75	
			HID-6080	60 X 80	
MPD-7575	PD-7575			75 X 75	
MPD-100100	PD-100100			100 X 100	


0102 KSS HALOGEN FREE WIRING DUCT



- Material: **UL94V-0** flame rated, UL approved PC/ABS, Halogen FREE.
- Color : Grey.
- PC/ABS service temperature: 100°C
- Features parallel holes on both sidewalls to facilitate cutting in wire application.



MHF SLOT : 8mm

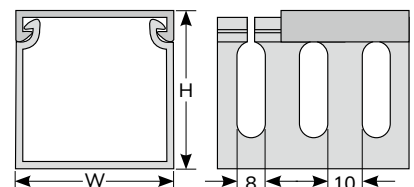

Item No.	W x H	Length
SLOT		
8mm	mm	
MHF-4040	40 X 40	2M

Wiring Ducts

Cable Markers

Cable Ties

Wrapping Bands

Cable Clamps & Tie Mounts

Glands, Bushings

Conduits

Bushings

Wire Connectors

Tubes

Cable Clips

PCB Parts

Fasteners