


# 0301 KSS COLD WEATHER CABLE TIE

- Material: UL94HB flame rated Nylon 66.
- Color: Black.
- Application: One piece self-lock cable tie save the time and make effective for installation.
- Feature: 1. Excellent resistance to low temperature and UV light.  
2. Min. installation temperature: -20°C.  
Min. operating temperature: -40°C.




Item No.	Length		W mm	Max. Bundle Dia. mm	Min. Loop Tensile Strength		Packing
	mm	inch			lbs	kgs	
CV-150CWBK	150	6"	3.6	36	40	18	100pcs
CV-200DCWBK	203	8"	4.8	52	50	22	
CV-250CWBK	250	10"	4.8	68	50	22	
CV-292CWBK	292	11 1/2"	3.6	82	40	18	
CV-300SCWBK	300	11 7/8"	4.8	83	50	22	
CV-368CWBK	368	14 1/2"	4.8	105	50	22	
CV-370CWBK	370	14 9/16"	7.6	101	120	55	
CV-380CWBK	380	15"	7.6	105	120	55	
CV-385CWBK	385	15 3/16"	4.8	110	50	22	
CV-450CWBK	450	17 3/4"	8.0	128	120	55	

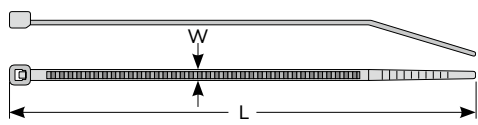


# 0301 KSS EXTRA HEAVY DUTY CABLE TIE



- Material: UL94V-2 flame rated, UL approved Nylon 66.
- Extra heavy duty ties for application where higher tensile strength is needed.

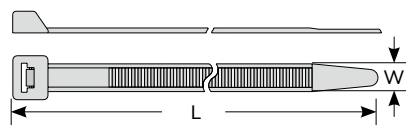

Standard design

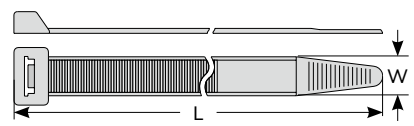

CV-255XXL

Item No.	Length		W mm	Max. Bundle Dia. mm	Min. Loop Tensile Strength		Packing
	mm	inch			lbs	kgs	
CV-230XL	230	9"	12.7	57	250	114	100 pcs
CV-255XXL	254	10"	17.8	42	120	55	
CV-280XL	280	11"	12.7	73	250	114	
CV-380XL	380	15"	12.7	105	250	114	
CV-480XL	480	18 7/8"	12.7	137	250	114	
CV-550L	550	21 11/16"	12.7	159	250	114	
CV-580XL	580	22 7/8"	12.7	169	250	114	
CV-730XL	730	28 3/4"	12.7	216	250	114	
CV-880XL	880	34 11/16"	12.7	264	250	114	
CV-1030XL	1030	40 1/2"	12.7	312	250	114	
NEW CV-1530XLT	1530	60 1/4"	12.7	473	250	114	

EXTRA HEAVY DUTY

