



# 0133 KSS ONE PIECE WIRING DUCT



- Material: **UL94V-0** and **M1** flame rated, UL approved PVC.
- Color : White.
- PVC service temperature: 85°C
- Feature: One piece design to facilitate application and time saving.

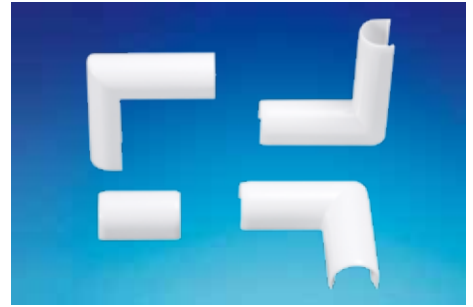


Item No.	W	W1	H	H1	Length mm	Connector	Connector Packing
	mm	mm	mm	mm			
RTF-10WE	13.1	11.6	10.8	8.2	1.5M With Adhesive Tape	L TYPE : RTFL-10WE INSIDE : RTFI-10WE OUTSIDE : RTFO-10WE MID-WAY : RTFM-10WE	20pcs



# 0140 KSS MOSAIC TRUNKING



- Material: **UL94V-0** and **M1** flame rated, UL approved PVC.
- Color : White.
- PVC service temperature: 85°C
- Feature: Mosaic design to mount switch/socket 45x45mm direct onto duct, hollow wall design.

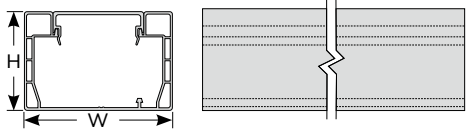


Item No.	W	H	Length
	mm	mm	
DX-7550WE	75	50	2M

# 0140 KSS MOSAIC TRUNKING CONNECTOR



- Material: **UL94HB** flame rated, UL approved ABS.
- Function: Apply with DX type mosaic trunking to connect trunkings easy and neatly.

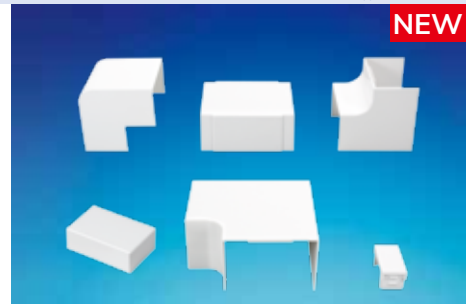

Type	Item No.	Used With	Packing
MID-WAY CONNECTOR	DXM-7550WE2	DX-7550WE	5pcs
INSIDE CORNER	DXI-7550WE2	DX-7550WE	
OUTSIDE CORNER	DXO-7550WE2	DX-7550WE	

Type	Item No.	Used With	Packing
"L" TYPE	DXL-7550WE2	DX-7550WE	5pcs
END PIECE	DXE-7550WE2	DX-7550WE	
COVER JOINT	DXJ-7550WE2	DX-7550WE	