


# 技術資料 Technical Data

## 端子索引 Terminal index

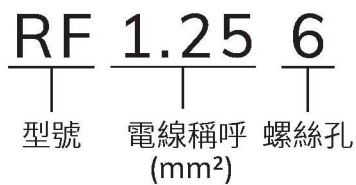

螺絲孔及螺絲尺寸 STUD SIZE	
mm - inch	mm - inch
3.2 - #4	6.4 - 1/4"
3.7 - #6	8.4 - 5/16"
4.3 - #8	10.5 - 3/8"
5.3 - #10	13.0 - 1/2"

絕緣端子基本顏色	
紅 RED:	1.25 mm <sup>2</sup> = AWG 22-16
藍 BLUE:	2.0 mm <sup>2</sup> = AWG 16-14
黑 BLACK:	3.5 mm <sup>2</sup> = AWG 14-12
黃 YELLOW:	5.5 mm <sup>2</sup> = AWG 12-10
●特殊顏色，歡迎洽詢	

型號	產品名稱	英文-產品名稱
R	R型端子	Ring Terminal
Y	Y型端子	Y Terminal
H	鉤型端子	Hook Terminal
LY	折角Y型端子	Flanged Spade Terminal
RF	R型絕緣端子	Insulated Ring Terminal
YF	Y型絕緣端子	Insulated Y Terminal
ERF	R型易進式絕緣端子	Insulated Ring Terminal Easy Entry
EYF	Y型易進式絕緣端子	Insulated Y Terminal Easy Entry
HF	絕緣鉤型端子	Insulated Hook Terminal
LYF	折角Y型絕緣端子	Flanged Spade Insulated Terminal
B	長銅管	Butt Splice
P	短銅管	Parallel Splice
PIN-AF	針型端子	Pin Insulated Terminals
PIN	針型裸端子	Pin Terminals
EPIN-AF	針型易進式端子	Pin Insulated Terminals Easy Entry
BF	中接端子	Butt Splice Insulated
BHS	防水熱收縮中接端子	Butt Splice (Water Proof & Heat Shrinkable)
BN	尼龍中接端子	Nylon Insulated Butt Splice
LV-B	公母插(公)	Male Lug
LV-A	公母插(母)	Female Lug
1.25-7A 2-7A 5.5-7A	公母插(母)	Non Insulated Female Lug
PV-A	絕緣公母插(母)	Insulated Female Lug
MF-A	鉤型公母插	Piggy Back Disconnects
PN-A	尼龍絕緣公母插(母)	Nylon Insulated Female Lug
PN-B	尼龍絕緣公母插(公)	Nylon Insulated Male Lug
ELV-B	易進式公母插(公)	Male Lug Easy Entry
ELV-A	易進式公母插(母)	Female Lug Easy Entry
CLV-A	公母插保護套	Female Lug Cover
F-B	子彈型(公)	Insulated Bullet
F-A	子彈型(母)	Fully Receptacle
FNH-B	尼龍絕緣子彈型(公)加銅套	Nylon Insulated Bullet
FNH-A	尼龍絕緣子彈型(母)加銅套	Nylon Fully Receptacle
FL-A	旗型裸端子	Flag Female Disconnects
VTL	透明旗型絕緣套	Vinyl Flag Sleeve
FLN-A	尼龍絕緣旗型端子	Nylon Insulated Flag Female Disconnects
BD	扁平端子	Blade Terminal
BD-F	扁平絕緣端子	Blade Insulated Terminal
LB	折角扁平端子	Lipped Blade Terminal
LB-F	折角扁平絕緣端子	Lipped Blade Insulated Terminal
VT	透明絕緣套	Vinyl Sleeve
C	銅管端子	Cable Lugs
CL	高壓長型端子(單孔式)	Cable Lugs-High Voltage
CL-2D	高壓長型端子(雙孔式)	Cable Lugs-High Voltage
BL	高壓長銅管	Cable Lugs-High Voltage
TC CTC TP	C型銅壓接管	C Type Copper Compression Connectors