


0620 KSS FLEXIBLE CONDUIT

- Material : PP
- Color: Black
- Function: For running cable protection in Electrical/Machinery/ Building Harness wiring.
- For split design PP flexible conduit, can use the KSS Split Wrapping Band Installation tool (see P.98) to wrap the wire easily.
- ※ It may be harder while inserting split design conduit to claw.

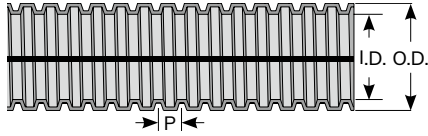

UNIT : mm

Item No.		I.D.	O.D.	P	Suitable Adaptor ※	Packing
Close design	Split design					
CR-05P	CRS-05P	5.6±0.4	7.9±0.4	2.6±0.3		300M
CR-07P	CRS-07P	7.4±0.4	10.2±0.4	2.6±0.3	PAQ-0707/PAQ-0709	
CR-11SP	CRS-11SP	10.7±0.4	14.0±0.4	2.6±0.3		
CR-11P	CRS-11P	10.7±0.4	16.0±0.4	3.3±0.4	PAQ-1216 / PAQ-1211 / PAQ-1209 / PAQ-12135 / BG-16 / BGQ-16	200M
CR-13P	CRS-13P	13.8±0.4	17.5±0.4	3.0±0.4	BG-18 / BGQ-18	
CR-15P	CRS-15P	15.0±0.4	19.5±0.4	3.3±0.4	BGQ-20	100M
CR-17P	CRS-17P	17.2±0.4	22.0±0.4	3.0±0.4	PAQ-17135 / PAQ-1721 / BG-22 / BGQ-22	
CR-19P	CRS-19P	19.3±0.4	23.8±0.4	3.3±0.4	BG-26 / BGQ-25	
CR-22P	CRS-22P	21.2±0.4	25.8±0.4	3.0±0.4	BG-26 / BGQ-26	50M
CR-24P	CRS-24P	24.3±0.4	32.0±0.4	4.6±0.4	BG-32 / BGQ-32	
CR-25P	CRS-25P	25.0±0.4	30.0±0.4	4.0±0.4	BG-32	
CR-28P	CRS-28P	28.0±0.4	34.0±0.4	3.0±0.4	BG-34 / BGQ-34	
CR-32P	CRS-32P	31.2±0.4	40.0±0.4	5.8±0.5	BG-40	
CR-35P	CRS-35P	34.9±0.4	42.0±0.4	3.3±0.4		
CR-40P	CRS-40P	39.6±0.5	50.0±0.5	6.7±0.5	BG-48 / BG-50	
CR-48P	CRS-48P	47.5±0.5	54.5±0.5	3.3±0.4	PAQ-4848	